



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Report No. : WTF23F11254998C
Applicant : Mid Ocean Brands B.V.
Address : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan,
Kowloon, Hong Kong
Manufacturer : 118144
Sample Name : USB foldable desk fan
Sample Model : MO2123
Test Requested : In according to the EU Directive 2023/1542, to determine the
heavy metals content in the submitted sample.
Test Method : With reference to IEC 62321-5:2013 & IEC 62321-4:2013+
AMD1:2017 CSV, analysis was performed by ICP-OES
Test Conclusion : **Pass** (The submitted battery sample does not exceed the
limit mentioned in Directive (EU) 2023/1542.)
Date of Receipt sample : 2023-11-30
Testing period : 2023-11-30 to 2023-12-06
Date of Issue : 2023-12-07
Test Result : Refer to next page (s)
Note : As per client's request, labelling assessment of the battery
was not conducted.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: 2/F., Building 1 and No.13-19, 2/F., 2nd Building, Sunlink Machinery City, Xingye 4 Road, Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun Town, Shunde District, Foshan, Guangdong, China
Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Signed for and on behalf of
Waltek Testing Group (Foshan) Co., Ltd.

Swing.Liang



Report No.: WTF23F11254998C

Sample photo:



WALTEK



Report No.: WTF23F11254998C

Test Results:

| Test Item(s) | Unit | Test Result | LOQ | Maximum Allowable Limit |
|--------------|------|-------------|--------|---|
| | | No.1 | | |
| Lead (Pb) | % | ND | 0.0002 | 0.01 (See comment if $0.01 \geq \text{Pb} > 0.004$) |
| Cadmium (Cd) | % | ND | 0.0002 | 0.002 (See comment if $\text{Cd} > 0.002$) |
| Mercury (Hg) | % | ND | 0.0002 | 0.0005 |

Note:

- (1) ND = Not Detected or lower than limit of quantitation
- (2) LOQ = Limit of quantitation
- (3) % = percentage by weight

Comment:

(1) Marking requirement:

According to EU Directive 2023/1542, all batteries, accumulators and battery packs shall be appropriately marked with the symbol as below:



Covered area on battery, accumulator or battery pack:

- Cylindrical cells: 1.5 % of surface area (maximum 5x5 cm);
 - Others: 3 % of surface area of the largest side (maximum 5 x 5 cm)
 - When the size of the battery, accumulator or battery pack is such that the symbol would be smaller than 0.5 x 0.5 cm, a symbol at least 1 x 1 cm shall be printed on the packaging.
- Symbols shall be printed visibly, legibly and indelibly

(2) When the sample consists lead exceeding 0.004% and less than 0.01%, the product is to be labeled with heavy metal content with the requirements as below:

- Mark with the chemical symbol for the metal concerned: Pb
- Print beneath the symbol
- Cover an area of at least ¼ of the size of the symbol

When the sample consists cadmium exceeding 0.002%, the product is to be labeled with heavy metal content with the requirements as below:

- Mark with the chemical symbol for the metal concerned: Cd
- Print beneath the symbol
- Cover an area of at least ¼ of the size of the symbol

Description for Specimen:


| Specimen No. | Specimen Description |
|--------------|----------------------|
| 1 | Silvery battery |





Report No.: WTF23F11254998C

Testing flow chart:

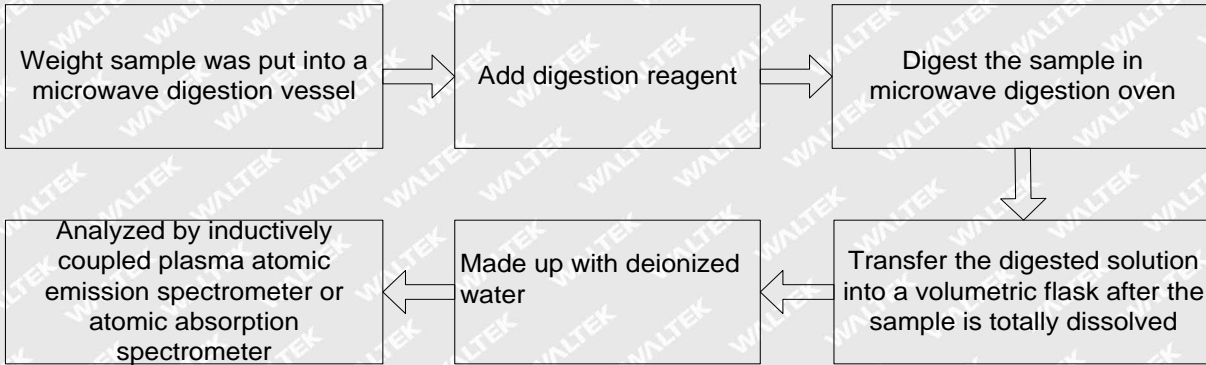

WALTEK



Report No.: WTF23F11254998C

Remarks:

1. The results shown in this test report refer only to the sample(s) tested;
2. This test report cannot be reproduced, except in full, without prior written permission of the company;
3. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver;
4. The Applicant name and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which Waltek hasn't verified;
5. If the report is not stamped with the accreditation recognized seal, it will only be used for scientific research, education, and internal quality control activities, and is not used for the purpose of issuing supporting data to the society.
6. The sample material information (Model No. information) is provided by client, not verified by test laboratory. The samples of reference Model No. are not tested. Test laboratory not responsible for the accuracy, appropriateness, completeness and authenticity of the information provided by client.

===== End of Report =====

WALTEK








Test Report issued under the responsibility of:



| | |
|---|--|
| TEST REPORT IEC 62133-2 Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems | |
| Report Number..... : | BCTC2212703937B |
| Date of issue..... : | 2023-02-28 |
| Total number of pages | 24 |
| Name of Testing Laboratory preparing the Report | Shenzhen BCTC Testing Co., Ltd. |
| Applicant's name | |
| Address..... | |
| Test specification: | |
| Standard | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |
| Test procedure | CB Scheme |
| Non-standard test method | N/A |
| TRF template used..... | IECEE OD-2020-F1:2021, Ed.1.4 |
| Test Report Form No. | IEC62133_2C |
| Test Report Form(s) Originator | DEKRA Certification B.V. |
| Master TRF | Dated 2022-07-01 |
| Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02. | |
| General disclaimer: | |
| The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report. | |

| | | | |
|---|--|--|--|
| Test item description..... : | | Polymer Li-ion Cell | |
| Trade Mark(s)..... : | |  | |
| Manufacturer | | | |
| Model/Type reference | | 103665 | |
| Ratings | | 3.7V, 3000mAh, 11.1Wh | |
| Responsible Testing Laboratory (as applicable), testing procedure and testing location(s): | | | |
| <input checked="" type="checkbox"/> | CB Testing Laboratory: | Shenzhen BCTC Testing Co., Ltd. | |
| Testing location/ address..... : | | 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China | |
| Tested by (name, function, signature)..... : | | Andre Yu (Project handler) |  |
| Approved by (name, function, signature).... : | | Peter Pan (Reviewer) |  |
| <input type="checkbox"/> | Testing procedure: CTF Stage 1: | | |
| Testing location/ address..... : | | | |
| Tested by (name, function, signature)..... : | | | |
| Approved by (name, function, signature).... : | | | |
| <input type="checkbox"/> | Testing procedure: CTF Stage 2: | | |
| Testing location/ address..... : | | | |
| Tested by (name + signature) | | | |
| Witnessed by (name, function, signature) . : | | | |
| Approved by (name, function, signature).... : | | | |
| <input type="checkbox"/> | Testing procedure: CTF Stage 3: | | |
| <input type="checkbox"/> | Testing procedure: CTF Stage 4: | | |
| Testing location/ address..... : | | | |
| Tested by (name, function, signature)..... : | | | |
| Witnessed by (name, function, signature) . : | | | |
| Approved by (name, function, signature).... : | | | |
| Supervised by (name, function, signature) : | | | |

| | |
|---|---|
| <p>List of Attachments (including a total number of pages in each attachment): National Differences (0 page) Enclosures (4 pages)</p> | |
| <p>Summary of testing:</p> | |
| <p>Tests performed (name of test and test clause): 7.2.1 Continuous charging at constant voltage (cells) 7.3.1 External short circuit (cell) 7.3.3 Free fall 7.3.4 Thermal abuse (cells) 7.3.5 Crush (cells) 7.3.7 Forced Discharge (cells) 7.3.9 Design evaluation – Forced internal short-circuit (cells)</p> | <p>Testing location: Shenzhen BCTC Testing Co., Ltd. 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China</p> |
| <p>Summary of compliance with National Differences (List of countries addressed): EU Group* *= No National or Group Differences declared</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 62133-2: 2017, EN 62133-2: 2017/A1:2021.</u></p> | |

Use of uncertainty of measurement for decisions on conformity (decision rule) :

No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:


The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

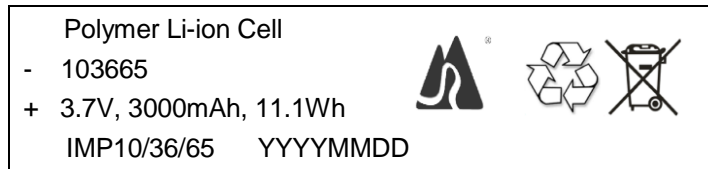**Data Code:**

The date code consists of the following:YYYYMMDD

YYYY: Four digitals represent year of manufacture.

MM: Two digitals represent month of manufacture.

DD: Two digitals represent day of manufacture.

| | |
|---|--|
| Test item particulars.....: | |
| Classification of installation and use.....: | To be defined in final product. |
| Supply Connection | DC terminal |
| Recommend charging method declared by the manufacturer | Charge at constant current 1500mA until the voltage reaches 4.2V, then charge at 4.2V until charge current declines to 60mA. |
| Discharge current (0,2 It A) | 600mA |
| Specified final voltage.....: | 3.0V |
| Upper limit charging voltage per cell.....: | 4.0V(0-10°C), 4.25V(10-55°C) |
| Maximum charging current | 3.0A |
| Charging temperature upper limit | 55°C |
| Charging temperature lower limit.....: | 0°C |
| Polymer cell electrolyte type.....: | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A |
| Possible test case verdicts: | |
| - test case does not apply to the test object.....: | N/A |
| - test object does meet the requirement.....: | P (Pass) |
| - test object does not meet the requirement.....: | F (Fail) |
| Testing.....: | |
| Date of receipt of test item | 2022-11-29 |
| Date (s) of performance of tests | 2022-12-01 to 2022-12-27 |
| General remarks: | |
| "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. | |
| Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator. | |
| Manufacturer's Declaration per sub-clause 4.2.5 of IEC62133 02: | |
| The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable |
| When differences exist; they shall be identified in the General product information section. | |
| Name and address of factory (ies) | |

General product information and other remarks:

1. The cell has been evaluated to comply with ST/SG/AC.10/11/Rev.7, 38.3.
2. Type reference IMP10/55/68 is IEC61960-3: 2017 requirement.
3. Specification of cell:

| | Cell |
|------------------------------|----------------------------------|
| Model | 103665 |
| Rated capacity | 3000mAh |
| Nominal voltage | 3.7V |
| Standard charge current | 1.5A |
| Standard discharge current | 1.5A |
| Maximum charge current | 3.0A |
| Maximum discharge current | 3.0A |
| Normal charging voltage | 4.2V |
| Charge cut-off current | 60mA |
| Final discharge voltage | 3.0V |
| Upper limit charging voltage | 4.0V (0-10°C) 4.25V (10-55°C) |
| Charging temperature range | 0~55°C |

| IEC 62133-2 | | | |
|-------------|--|---------------------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 4 | PARAMETER MEASUREMENT TOLERANCES | | P |
| | Parameter measurement tolerances | | P |
| 5 | GENERAL SAFETY CONSIDERATIONS | | P |
| 5.1 | General | | P |
| | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse | | P |
| 5.2 | Insulation and wiring | | N/A |
| | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ | No externally exposed metal surfaces. | N/A |
| | Insulation resistance (MΩ) : | | — |
| | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements | | N/A |
| | Orientation of wiring maintains adequate clearances and creepage distances between conductors | | N/A |
| | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse | | N/A |
| 5.3 | Venting | | P |
| | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition | | P |
| | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief | | N/A |
| 5.4 | Temperature, voltage and current management | | N/A |
| | Batteries are designed such that abnormal temperature rise conditions are prevented | | N/A |
| | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer | | N/A |
| | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified | | N/A |
| 5.5 | Terminal contacts | | P |

| IEC 62133-2 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current | | P |
| | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance | | P |
| | Terminal contacts are arranged to minimize the risk of short circuits | | N/A |
| 5.6 | Assembly of cells into batteries | | N/A |
| 5.6.1 | General | | N/A |
| | Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region | | N/A |
| | This protection may be provided external to the battery such as within the charger or the end devices | | N/A |
| | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation | | N/A |
| | If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions | | N/A |
| | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly | | N/A |
| | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer | | N/A |
| | Protective circuit components are added as appropriate and consideration given to the end-device application | | N/A |
| | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance | | N/A |
| 5.6.2 | Design recommendation | | N/A |
| | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2 | | N/A |

| IEC 62133-2 | | | |
|-------------|--|-----------------|----------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks | | N/A |
| | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks | | N/A |
| | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection | | N/A |
| | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer | | N/A |
| | It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage | | N/A |
| | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system | | N/A |
| 5.6.3 | Mechanical protection for cells and components of batteries | | N/A |
| | Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse | | N/A |
| | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product | | N/A |
| | The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer | | N/A |
| | For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests | | N/A |
| 5.7 | Quality plan | | P |

| IEC 62133-2 | | | |
|-------------|---|--------------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery | ISO 9001 certificate provided. | P |
| 5.8 | Battery safety components | | N/A |
| 6 | TYPE TEST AND SAMPLE SIZE | | P |
| | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old | | P |
| | The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1 | Not coin cell. | N/A |
| | Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C \pm 5 °C | | P |
| | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection | | N/A |
| | When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test | | N/A |
| 7 | SPECIFIC REQUIREMENTS AND TESTS | | P |
| 7.1 | Charging procedure for test purposes | | P |
| 7.1.1 | First procedure | | P |
| | This charging procedure applies to subclauses other than those specified in 7.1.2 | | P |
| | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C \pm 5 °C, using the method declared by the manufacturer | | P |
| | Prior to charging, the battery has been discharged at 20 °C \pm 5 °C at a constant current of 0,2 It A down to a specified final voltage | | P |
| 7.1.2 | Second procedure | | P |
| | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9 | | P |

| IEC 62133-2 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method | | P |
| 7.2 | Intended use | | P |
| 7.2.1 | Continuous charging at constant voltage (cells) | | P |
| | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer | | P |
| | Results: no fire, no explosion, no leakage..... : (See appended table 7.2.1) | | P |
| 7.2.2 | Case stress at high ambient temperature (battery) | | N/A |
| | Oven temperature (°C)..... : | | — |
| | Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells | | N/A |
| 7.3 | Reasonably foreseeable misuse | | P |
| 7.3.1 | External short-circuit (cell) | | P |
| | The cells were tested until one of the following occurred: | | P |
| | - 24 hours elapsed; or | | N/A |
| | - The case temperature declined by 20 % of the maximum temperature rise | | P |
| | Results: no fire, no explosion..... : (See appended table 7.3.1) | | P |
| 7.3.2 | External short-circuit (battery) | | N/A |
| | The batteries were tested until one of the following occurred: | | N/A |
| | - 24 hours elapsed; or | | N/A |
| | - The case temperature declined by 20 % of the maximum temperature rise | | N/A |
| | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition | | N/A |
| | A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test | | N/A |

| IEC 62133-2 | | | |
|-------------|--|----------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor | | N/A |
| | Results: no fire, no explosion..... : | (See appended table 7.3.2) | N/A |
| 7.3.3 | Free fall | | P |
| | Results: no fire, no explosion | | P |
| 7.3.4 | Thermal abuse (cells) | | P |
| | Oven temperature (°C)..... : | 130 | — |
| | Results: no fire, no explosion | | P |
| 7.3.5 | Crush (cells) | | P |
| | The crushing force was released upon: | | P |
| | - The maximum force of 13 kN ± 0,78 kN has been applied; or | | P |
| | - An abrupt voltage drop of one-third of the original voltage has been obtained | | N/A |
| | Results: no fire, no explosion..... : | (See appended table 7.3.5) | P |
| 7.3.6 | Over-charging of battery | | N/A |
| | The supply voltage which is: | | N/A |
| | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or | | N/A |
| | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and | | N/A |
| | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached | | N/A |
| | Test was continued until the temperature of the outer casing: | | N/A |
| | - Reached steady state conditions (less than 10 °C change in 30-minute period); or | | N/A |
| | - Returned to ambient | | N/A |
| | Results: no fire, no explosion..... : | (See appended table 7.3.6) | N/A |
| 7.3.7 | Forced discharge (cells) | | P |
| | Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer | | P |
| | The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage | | P |

| IEC 62133-2 | | | |
|-------------|---|-----------------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | - The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration | | N/A |
| | - The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration | | P |
| | Results: no fire, no explosion | (See appended table 7.3.7) | P |
| 7.3.8 | Mechanical tests (batteries) | | N/A |
| 7.3.8.1 | Vibration | | N/A |
| | Results: no fire, no explosion, no rupture, no leakage or venting. | (See appended table 7.3.8.1) | N/A |
| 7.3.8.2 | Mechanical shock | | N/A |
| | Results: no leakage, no venting, no rupture, no explosion and no fire | (See appended table 7.3.8.2) | N/A |
| 7.3.9 | Design evaluation – Forced internal short-circuit (cells) | | P |
| | The cells complied with national requirement for | France, Japan, Korea, Switzerland | — |
| | The pressing was stopped upon: | | P |
| | - A voltage drop of 50 mV has been detected; or | | N/A |
| | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached | 400 N for prismatic cells. | P |
| | Results: no fire | (See appended table 7.3.9) | P |
| 8 | INFORMATION FOR SAFETY | | P |
| 8.1 | General | | P |
| | Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products | | P |
| | Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users | | N/A |
| | Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product | | N/A |
| | As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user | | N/A |

| IEC 62133-2 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Do not allow children to replace batteries without adult supervision | | N/A |
| 8.2 | Small cell and battery safety information | Not small cell | N/A |
| | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them: | | N/A |
| | - Keep small cells and batteries which are considered swallowable out of the reach of children | | N/A |
| | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion | | N/A |
| | - In case of ingestion of a cell or battery, seek medical assistance promptly | | N/A |
| 9 | MARKING | | P |
| 9.1 | Cell marking | | P |
| | Cells are marked as specified in IEC 61960, except coin cells | | P |
| | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity | | N/A |
| | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked | | N/A |
| 9.2 | Battery marking | | N/A |
| | Batteries are marked as specified in IEC 61960, except for coin batteries | | N/A |
| | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity | | N/A |
| | Batteries are marked with an appropriate caution statement | | N/A |
| | - Terminals have clear polarity marking on the external surface of the battery, or | | N/A |
| | - Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections | | N/A |
| 9.3 | Caution for ingestion of small cells and batteries | Not small cells | N/A |
| | Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2 | | N/A |

| IEC 62133-2 | | | |
|----------------|--|---|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package | | N/A |
| 9.4 | Other information | | N/A |
| | The following information are marked on or supplied with the battery: | | N/A |
| | - Storage and disposal instructions | | N/A |
| | - Recommended charging instructions | | N/A |
| 10 | PACKAGING AND TRANSPORT | | P |
| | Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3 | Not coin cell. | N/A |
| ANNEX A | CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE | | P |
| A.1 | General | | P |
| A.2 | Safety of lithium ion secondary battery | | P |
| A.3 | Consideration on charging voltage | | P |
| A.3.1 | General | | P |
| A.3.2 | Upper limit charging voltage | | P |
| A.3.2.1 | General | | P |
| A.3.2.2 | Explanation of safety viewpoint | | N/A |
| A.3.2.3 | Safety requirements, when different upper limit charging voltage is applied | | N/A |
| A.4 | Consideration of temperature and charging current | | P |
| A.4.1 | General | | P |
| A.4.2 | Recommended temperature range | Charging temperature range declared by client is 0-55°C | P |
| A.4.2.1 | General | | P |
| A.4.2.2 | Safety consideration when a different recommended temperature range is applied | | P |
| A.4.3 | High temperature range | 55°C used for test. | N/A |
| A.4.3.1 | General | | N/A |
| A.4.3.2 | Explanation of safety viewpoint | | N/A |
| A.4.3.3 | Safety considerations when specifying charging conditions in the high temperature range | | N/A |

| IEC 62133-2 | | | |
|-------------|---|-----------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| A.4.3.4 | Safety considerations when specifying a new upper limit in the high temperature range | | N/A |
| A.4.4 | Low temperature range | 0°C and 10°C used for test. | N/A |
| A.4.4.1 | General | | N/A |
| A.4.4.2 | Explanation of safety viewpoint | | N/A |
| A.4.4.3 | Safety considerations, when specifying charging conditions in the low temperature range | | N/A |
| A.4.4.4 | Safety considerations when specifying a new lower limit in the low temperature range | | N/A |
| A.4.5 | Scope of the application of charging current | | P |
| A.4.6 | Consideration of discharge | | P |
| A.4.6.1 | General | | P |
| A.4.6.2 | Final discharge voltage and explanation of safety viewpoint | | P |
| A.4.6.3 | Discharge current and temperature range | | P |
| A.4.6.4 | Scope of application of the discharging current | | P |
| A.5 | Sample preparation | | P |
| A.5.1 | General | | P |
| A.5.2 | Insertion procedure for nickel particle to generate internal short | | P |
| A.5.3 | Disassembly of charged cell | | P |
| A.5.4 | Shape of nickel particle | | P |
| A.5.5 | Insertion of nickel particle in cylindrical cell | | N/A |
| A.5.5.1 | Insertion of nickel particle in winding core | | N/A |
| A.5.5.2 | Marking the position of the nickel particle on both ends of the winding core of the separator | | N/A |
| A.5.6 | Insertion of nickel particle in prismatic cell | | P |
| A.6 | Experimental procedure of the forced internal short-circuit test | | P |
| A.6.1 | Material and tools for preparation of nickel particle | | P |
| A.6.2 | Example of a nickel particle preparation procedure | | P |
| A.6.3 | Positioning (or placement) of a nickel particle | | P |
| A.6.4 | Damaged separator precaution | | P |
| A.6.5 | Caution for rewinding separator and electrode | | P |
| A.6.6 | Insulation film for preventing short-circuit | | P |
| A.6.7 | Caution when disassembling a cell | | P |
| A.6.8 | Protective equipment for safety | | P |

| IEC 62133-2 | | | |
|----------------|--|--------------------------|------------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| A.6.9 | Caution in the case of fire during disassembling | | P |
| A.6.10 | Caution for the disassembling process and pressing the electrode core | | P |
| A.6.11 | Recommended specifications for the pressing device | | P |
| ANNEX B | RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS | | P |
| ANNEX C | RECOMMENDATIONS TO THE END-USERS | | N/A |
| ANNEX D | MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS | | N/A |
| D.1 | General | | N/A |
| D.2 | Method | | N/A |
| | A sample size of three coin cells is required for this measurement | | N/A |
| | Coin cells with an internal resistance greater than 3 Ω require no further testing | (See appended table D.2) | N/A |
| | Coin cells with an internal resistance less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1 | | N/A |
| ANNEX E | PACKAGING AND TRANSPORT | | P |
| ANNEX F | COMPONENT STANDARDS REFERENCES | | N/A |

| IEC 62133-2 | | | |
|-------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| 7.2.1 | TABLE: Continuous charging at constant voltage (cells) | | | | P |
|-----------------------------------|--|---|-----------------------|---------|---|
| Sample No. | Recommended charging voltage Vc (Vdc) | Recommended charging current I _{rec} (A) | OCV before test (Vdc) | Results | |
| C01 | 4.2 | 1.5 | 4.196 | A, B | |
| C02 | 4.2 | 1.5 | 4.198 | A, B | |
| C03 | 4.2 | 1.5 | 4.198 | A, B | |
| C04 | 4.2 | 1.5 | 4.196 | A, B | |
| C05 | 4.2 | 1.5 | 4.197 | A, B | |
| Supplementary information: | | | | | |
| A - No fire or explosion; | | | | | |
| B - No leakage; | | | | | |
| C - Others (please explain). | | | | | |

| 7.3.1 | TABLE: External short circuit (cell) | | | | | P |
|---|--------------------------------------|----------------------------|----------------------------|--------------------------------------|---------|---|
| Sample No. | Ambient (°C) | OCV at start of test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise ΔT (K) | Results | |
| Samples charged at charging temperature upper limit 55°C | | | | | | |
| C06 | 55.9 | 4.231 | 82 | 71.3 | A, C | |
| C07 | 55.9 | 4.231 | 85 | 73.8 | A, C | |
| C08 | 55.9 | 4.230 | 81 | 69.1 | A, C | |
| C09 | 55.9 | 4.231 | 81 | 65.8 | A, C | |
| C10 | 55.9 | 4.230 | 81 | 67.0 | A, C | |
| Samples charged at charging temperature lower limit 10°C | | | | | | |
| C11 | 56.3 | 4.163 | 82 | 77.2 | A, C | |
| C12 | 56.3 | 4.166 | 85 | 72.4 | A, C | |
| C13 | 56.3 | 4.163 | 81 | 73.0 | A, C | |
| C14 | 56.3 | 4.172 | 82 | 66.6 | A, C | |
| C15 | 56.3 | 4.162 | 83 | 70.4 | A, C | |
| Samples charged at charging temperature lower limit 0°C | | | | | | |
| C16 | 56.6 | 3.956 | 81 | 66.6 | A, C | |
| C17 | 56.6 | 3.956 | 81 | 69.3 | A, C | |
| C18 | 56.6 | 3.959 | 83 | 70.9 | A, C | |
| C19 | 56.6 | 3.953 | 78 | 67.0 | A, C | |
| C20 | 56.6 | 3.955 | 82 | 70.2 | A, C | |

| IEC 62133-2 | | | |
|-------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

Supplementary information:

A - No fire or explosion;

B - The test was completed after 24 hours elapsed;

C - The test was completed after the cell casing cooled to 20% of the maximum temperature rise;

D - Others (please explain).

| 7.3.2 | TABLE: External short circuit (battery) | | | | | N/A |
|------------|---|-----------------------|----------------------------|--------------------------------------|----------------------------------|---------|
| Sample No. | Ambient T (°C) | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise ΔT (K) | Component single fault condition | Results |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Supplementary information:

A - No fire or explosion;

B - The test was completed after 24 hours elapsed;

C - The test was completed after the case temperature declined by 20 % of the maximum temperature rise;

D - Rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reaches a low end steady state condition;

E - Others (please explain).

| 7.3.5 | TABLE: Crush (cells) | | | | P |
|---|-----------------------|--|---|---------|---|
| Sample No. | OCV before test (Vdc) | OCV at removal of crushing force (Vdc) | Maximum force applied to the cell during crush (kN) | Results | |
| Samples charged at charging temperature upper limit 55°C | | | | | |
| C39 | 4.230 | 4.229 | 12.95 | A, B | |
| C40 | 4.232 | 4.230 | 12.95 | A, B | |
| C41 | 4.230 | 4.230 | 12.95 | A, B | |
| C42 | 4.231 | 4.230 | 12.96 | A, B | |
| C43 | 4.231 | 4.229 | 12.96 | A, B | |
| Samples charged at charging temperature lower limit 10°C | | | | | |
| C44 | 4.163 | 4.162 | 12.95 | A, B | |
| C45 | 4.163 | 4.162 | 12.96 | A, B | |
| C46 | 4.162 | 4.161 | 12.96 | A, B | |
| C47 | 4.163 | 4.161 | 12.96 | A, B | |

| IEC 62133-2 | | | | |
|--|--------------------|-------|-----------------|---------|
| Clause | Requirement + Test | | Result - Remark | Verdict |
| C48 | 4.164 | 4.163 | 12.96 | A, B |
| Samples charged at charging temperature lower limit 0°C | | | | |
| C49 | 3.956 | 3.955 | 12.96 | A, B |
| C50 | 3.955 | 3.954 | 12.96 | A, B |
| C51 | 3.955 | 3.954 | 12.95 | A, B |
| C52 | 3.957 | 3.955 | 12.95 | A, B |
| C53 | 3.954 | 3.953 | 12.96 | A, B |
| Supplementary information: | | | | |
| A - No fire or explosion; | | | | |
| B - Force released after maximum level reached; | | | | |
| C - An abrupt voltage drop of one-third of the original voltage has been obtained; | | | | |
| D - Others (please explain). | | | | |

| 7.3.6 | TABLE: Over-charging of battery | | | | N/A |
|---|---------------------------------|------------------------------|-------------------------------------|---------|-----|
| Constant charging current (A) | | | | — | |
| Supply voltage (Vdc) | | | | — | |
| Sample No. | OCV before charging (Vdc) | Total charging time (minute) | Maximum outer case temperature (°C) | Results | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Supplementary information: | | | | | |
| A - No fire or explosion; | | | | | |
| B - The temperature of the outer casing reached steady state conditions (less than 10 °C change in 30-minute period); | | | | | |
| C - The temperature of the outer casing returned to ambient; | | | | | |
| D - Others (please explain). | | | | | |

| 7.3.7 | TABLE: Forced discharge (cells) | | | | P |
|------------|--|--|-------------------------------------|---------|---|
| Sample No. | OCV before application of reverse charge (Vdc) | Measured reverse charge I _r (A) | Lower limit discharge voltage (Vdc) | Results | |
| C54 | 3.469 | 3.0 | 3.0 | A, C | |
| C55 | 3.467 | 3.0 | 3.0 | A, C | |
| C56 | 3.472 | 3.0 | 3.0 | A, C | |
| C57 | 3.471 | 3.0 | 3.0 | A, C | |

| IEC 62133-2 | | | | | |
|---|--------------------|-----|-----|-----------------|---------|
| Clause | Requirement + Test | | | Result - Remark | Verdict |
| C58 | 3.472 | 3.0 | 3.0 | 3.0 | A, C |
| Supplementary information: | | | | | |
| A - No fire or explosion; | | | | | |
| B - The voltage reach negative value of upper limit charging voltage; | | | | | |
| C - The voltage did not reach negative value of upper limit charging voltage; | | | | | |
| D - Others (please explain). | | | | | |

| 7.3.8.1 | TABLE: Vibration | | | | | N/A |
|--|-----------------------|----------------------|----------------------|---------------------|---------|-----|
| Sample No. | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Supplementary information: | | | | | | |
| A - No fire. No explosion. No leakage. No venting. No rupture; | | | | | | |
| B - Others (please explain). | | | | | | |

| 7.3.8.2 | TABLE: Mechanical shock | | | | | N/A |
|--|-------------------------|----------------------|----------------------|---------------------|---------|-----|
| Sample No. | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Supplementary information: | | | | | | |
| A - No fire. No explosion. No leakage. No venting. No rupture; | | | | | | |
| B - Others (please explain). | | | | | | |

| 7.3.9 | TABLE: Forced internal short circuit (cells) | | | | | P |
|---|--|-----------------------|---------------------------------|------------------------------|---------|---|
| Sample No. | Chamber ambient T (°C) | OCV before test (Vdc) | Particle location ¹⁾ | Maximum applied pressure (N) | Results | |
| Samples charged at charging temperature upper limit 55°C | | | | | | |
| C59 | 55 | 4.231 | 1 | 400.1 | A | |
| C60 | 55 | 4.230 | 1 | 400.3 | A | |
| C61 | 55 | 4.230 | 1 | 400.1 | A | |
| C62 | 55 | 4.230 | 1 | 400.2 | A | |
| C63 | 55 | 4.231 | 1 | 400.3 | A | |
| Samples charged at charging temperature lower limit 10°C | | | | | | |

| IEC 62133-2 | | | | | |
|--|--------------------|-------|---|-----------------|---------|
| Clause | Requirement + Test | | | Result - Remark | Verdict |
| C64 | 10 | 4.165 | 1 | 400.2 | A |
| C65 | 10 | 4.163 | 1 | 400.1 | A |
| C66 | 10 | 4.162 | 1 | 400.1 | A |
| C67 | 10 | 4.165 | 1 | 400.2 | A |
| C68 | 10 | 4.164 | 1 | 400.1 | A |
| Samples charged at charging temperature lower limit 0°C | | | | | |
| C69 | 0 | 3.955 | 1 | 400.1 | A |
| C70 | 0 | 3.957 | 1 | 400.2 | A |
| C71 | 0 | 3.955 | 1 | 400.1 | A |
| C72 | 0 | 3.956 | 1 | 400.1 | A |
| C73 | 0 | 3.956 | 1 | 400.2 | A |
| Supplementary information: | | | | | |
| ¹⁾ Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. A - No fire or explosion; B - Others (please explain). | | | | | |

| D.2 | TABLE: Internal AC resistance for coin cells | | | | N/A |
|--|--|----------------|--------------------|-----------------------|-----|
| Sample no. | Ambient T (°C) | Store time (h) | Resistance Rac (Ω) | Results ¹⁾ | |
| | | | | | |
| | | | | | |
| | | | | | |
| Supplementary information: | | | | | |
| ¹⁾ Coin cells with an internal resistance less than or equal to 3 Ω, see test result on corresponding tables according to Clause 6 and Table 1. | | | | | |



| IEC 62133-2 | | | |
|-------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| TABLE: Critical components information | | | | | P |
|---|---|--------------------|--|----------|-------------------------------------|
| Object / part No. | Manufacturer/ trademark | Type / model | Technical data | Standard | Mark(s) of conformity ¹⁾ |
| -Electrolyte | Hunan Hisun New Energy Materials Co., Ltd | HS-C3023 | EC: DEC=3: 7 LiPF ₆ 1mol/L | -- | -- |
| -Separator | SHENZHEN DINGTAIXIANG NEW ENERGY TECHNOLOGY Co., Ltd | DTX-17 | PE, 0.014±0.002mm (thickness)*60±0.5mm (width), Shutdown temperature: 130°C | -- | -- |
| -Positive electrode | Jiangmen Kanhoo Industry Co., LTD BASF SHANSHAN BATTERY Materials Co., Ltd. | TE509B+ LM011XP | Li(Ni _{0.55} Mn _{0.3} Co _{0.15})O ₂ , LiMn ₂ O ₄ , Al Foil, 1030±10mm*56.5±5m m*0.138±0.01mm | -- | -- |
| -Negative electrode | Shenzhen RFT Technology Co., LTD | RFT013 | Graphite, Cu Foil, 963±10mm*57.5±5m m*0.133±0.01mm | -- | -- |
| Supplementary information: | | | | | |
| 1) Provided evidence ensures the agreed level of compliance. See OD-2039. | | | | | |


Enclosure

| Supplement ID | Description |
|---------------|------------------------------------|
| 01 | Photograph |
| 02 | Dimension drawing |
| 03 | Safety information and instruction |

ID 01

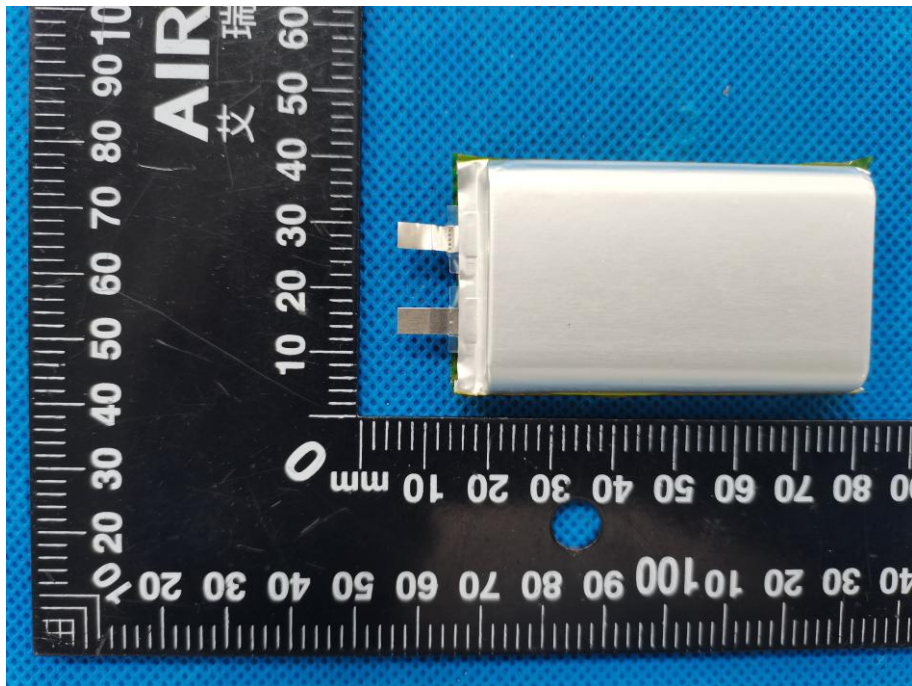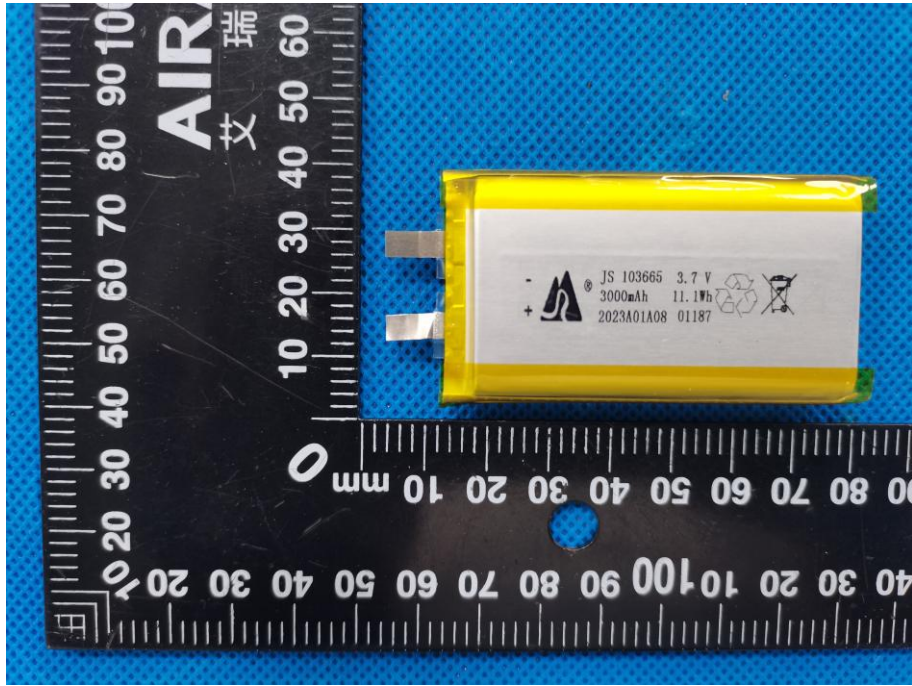

ID 02

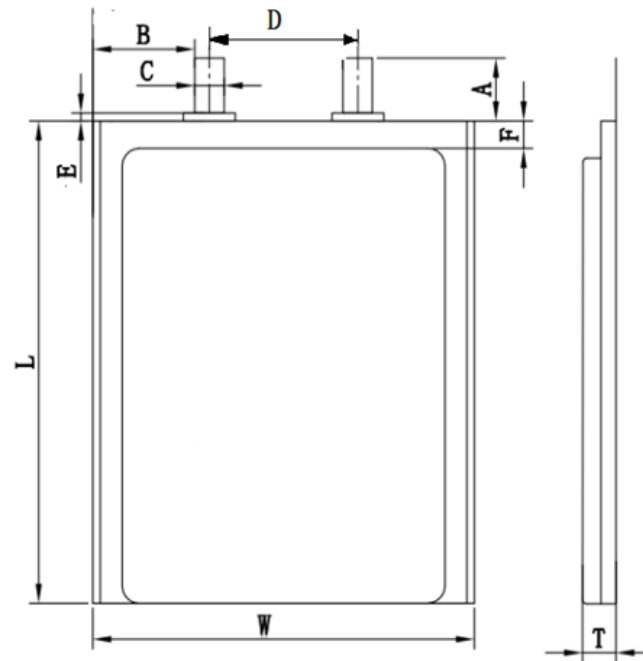

| Items | Description | Dimension and Spec |
|-------|--------------------------------|--------------------|
| T | 电芯厚度 | 10.0mm Max |
| W | 电芯宽度 | 36.0mm Max |
| L | 电芯长度 | 65.0mm Max |
| D | Tab 中心距 | 13.0±2.0mm |
| C | Tab 宽度 | 4.0±0.1mm |
| F | 顶封宽度 | 3.0±0.5mm |
| E | <u>极耳胶外露</u> | 0.5-2.0mm |
| A | <u>极耳长度</u> (<u>含极耳胶</u>) | 9±2.0mm |

Cell

ID 03
Danger!

危 险!

- Do not immerse the battery in water or allow it to get wet.
- 勿将电池投入水中或将其弄湿!
- Do not use or store the battery near sources of heat such as a fire or heater.
- 禁止在火源或极热条件下给电池充电! 勿在热源(如火或加热器)附近使用或贮存电池! 如果电池泄漏或发出异味, 应立即将其从接近明火处移开;
- Do not use any chargers other than those recommended by special charger.
- 请使用专用充电器!
- Do not reverse the positive(+) and negative(-) terminals.
- 勿将正负极接反!
- Do not connect the battery directly to wall outlets or car cigarette-lighter sockets.
- 勿将电池直接连接到墙上插座或车载点烟式插座上!
- Do not put the battery into a fire or apply direct heat to it.
- 勿将电池投入火中或给电池加热!
- Do not short-circuit the battery by connecting wires or other metal objects to the positive(+) and negative(-) terminals.
- 禁止用导线或其它金属物体将电池正负极短路, 禁止将电池与项链、发夹或其它金属物体一起运输或贮存!
- Do not pierce the battery casing with a nail or other sharp object, break it open with a hammer, or step on it.
- 禁止用钉子或其它尖锐物体刺穿电池壳体, 禁止锤击或脚踏电池!
- Do not strike, throw or subject the battery to sever physical shock.
- 禁止撞击、投掷或者使电池受到机械震动
- Do not directly solder the battery terminals.
- 禁止直接焊接电池端子!
- Do not attempt to disassemble or modify the battery in any way.
- 禁止以任何方式分解电池!
- Do not place the battery in a microwave oven or pressurized container.
- 禁止将电池置入微波炉或压力容器中!
- Do not use the battery in combination with primary batteries (such as dry-cell batteries) or batteries of different capacity, type or brand.
- 禁止与一次电池(如干电池)或不同容量、型号、品种电池组合使用!
- Do not use the battery if it gives off an odor, generates heat, becomes discolored or deformed, or appears abnormal in any way. If the battery is in use or being recharged, remove it from the device or charger immediately and discontinue use.
- 如果电池发出异味、发热、变形、变色或出现其它任何异常现象时不得使用; 如果电池正在使用或充电, 应立即从用电器中或充电器上取出并停止使用!

Caution!

注 意!

Do not use or store the battery where is exposed to extremely hot, such as under window of a car in direct sunlight in a hot day. Otherwise, the battery may be overheated. This can also reduce battery performance and/or shorten service life.

不要使用处于极热环境中的电池, 如阳光直射或热天的车内。否则, 电池会过热, 可能着火(点燃), 这样就会影响电池的性能、缩短电池的使用寿命。

If the battery leaks and electrolyte gets in your eyes, do not rub them. Instead, rinse them with clean running water and immediately seek medical attention. If left as is, electrolyte can cause eye injury.

如果电池漏液后电解液进入眼睛, 不要擦, 应用水冲洗, 立即寻求医疗救助。如不及时处理, 眼睛将会受到伤害。

Use the battery only under the following environmental conditions. Failure to do so can result in reduced performance or a shorten service life. Recharging the battery outside of these temperatures can cause the battery to overheat, explode or catch fire.