



中国认可  
国际互认  
检测  
TESTING  
CNAS L4062



# TEST REPORT

Reference No..... : WTF23X06138827W003  
 Manufacturer ..... : Mid Ocean Brands B.V.  
 Address ..... : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong  
 Factory ..... : 114768  
 Product Name ..... : Recycled ABS TWS Earbuds  
 Model No..... : MO6946  
 Standards ..... : EN 55032:2015+A1:2020; EN 55035:2017+A11:2020  
 EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A2:2021  
 ETSI EN 301 489-1 V2.2.3 (2019-11)  
 Draft ETSI EN 301 489-17 V3.2.5 (2022-08)  
 Date of Receipt sample .... : 2023-06-27  
 Date of Test..... : 2023-06-27 to 2023-07-12  
 Date of Issue ..... : 2023-07-12  
 Test Report Form No. .... : WTX\_ETSI EN 301 489\_1\_2019W  
 Test Result..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
 Block 70 Bao'an District, Shenzhen, Guangdong, China  
 Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Gala Wang

Approved by:

Silin Chen



## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	7
1.5 EUT SETUP AND OPERATION MODE.....	8
1.6 PERFORMANCE CRITERIA FOR EMS.....	9
1.7 MEASUREMENT UNCERTAINTY.....	11
1.8 TEST EQUIPMENT LIST AND DETAILS.....	12
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>15</b>
<b>3. CONDUCTED EMISSIONS.....</b>	<b>16</b>
3.1 TEST PROCEDURE.....	16
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	16
3.3 ENVIRONMENTAL CONDITIONS.....	16
3.4 CONDUCTED EMISSIONS TEST DATA.....	16
<b>4. RADIATED EMISSIONS.....</b>	<b>19</b>
4.1 TEST PROCEDURE.....	19
4.2 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
4.3 ENVIRONMENTAL CONDITIONS.....	20
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	20
<b>5. HARMONIC CURRENT EMISSIONS.....</b>	<b>26</b>
5.1 TEST SETUP BLOCK DIAGRAM.....	26
5.2 TEST STANDARDS.....	26
5.3 ENVIRONMENTAL CONDITIONS.....	26
5.4 HARMONIC CURRENT EMISSIONS TEST DATA.....	26
<b>6. VOLTAGE FLUCTUATION AND FLICKER.....</b>	<b>32</b>
6.1 TEST SETUP BLOCK DIAGRAM.....	32
6.2 TEST STANDARDS.....	32
6.3 ENVIRONMENTAL CONDITIONS.....	32
6.4 VOLTAGE FLUCTUATION AND FLICKER TEST DATA.....	32
<b>7. ELECTROSTATIC DISCHARGE (ESD).....</b>	<b>34</b>
7.1 TEST SETUP BLOCK DIAGRAM.....	34
7.2 TEST PERFORMANCE.....	34
7.3 ENVIRONMENTAL CONDITIONS.....	34
7.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST DATA.....	34
<b>8. RADIO FREQUENCY ELECTROMAGNETIC FIELD (R/S).....</b>	<b>36</b>
8.1 TEST SETUP BLOCK DIAGRAM.....	36
8.2 TEST PERFORMANCE.....	36
8.3 ENVIRONMENTAL CONDITIONS.....	36
8.4 CONTINUOUS RADIATED DISTURBANCES TEST DATA.....	36
<b>9. FAST TRANSIENTS, COMMON MODE (EFT).....</b>	<b>38</b>
9.1 TEST SETUP BLOCK DIAGRAM.....	38
9.2 TEST PERFORMANCE.....	38
9.3 ENVIRONMENTAL CONDITIONS.....	38
9.4 ELECTRICAL FAST TRANSIENTS TEST DATA.....	38
<b>10. SURGES.....</b>	<b>40</b>
10.1 TEST SETUP BLOCK DIAGRAM.....	40
10.2 TEST PERFORMANCE.....	40
10.3 ENVIRONMENTAL CONDITIONS.....	40
10.4 SURGE TEST DATA.....	40



<b>11. RADIO FREQUENCY, COMMON MODE (C/S)</b> .....	<b>42</b>
11.1 TEST SETUP BLOCK DIAGRAM .....	42
11.2 TEST PERFORMANCE .....	42
11.3 ENVIRONMENTAL CONDITIONS .....	42
11.4 CONTINUOUS CONDUCTED DISTURBANCES TEST DATA .....	42
<b>12. VOLTAGE DIPS AND INTERRUPTIONS</b> .....	<b>44</b>
12.1 TEST SETUP BLOCK DIAGRAM .....	44
12.2 TEST PERFORMANCE .....	44
12.3 ENVIRONMENTAL CONDITIONS .....	44
12.4 VOLTAGE DIPS AND INTERRUPTIONS TEST DATA .....	44
<b>EXHIBIT 1 - EUT PHOTOGRAPHS</b> .....	<b>45</b>
<b>EXHIBIT 2 - TEST SETUP PHOTOGRAPHS</b> .....	<b>46</b>

**WALTEK**



## Report version

Version No.	Date of issue	Description
Rev.00	2023-07-12	Original
/	/	/

# WALTEK



## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Recycled ABS TWS Earbuds
Trade Name:	/
Model No.:	MO6946
Adding Model(s):	/
Rated Voltage:	DC3.7V
Battery Capacity:	30mAh
Adapter Model:	/
Software Version:	V1.0
Hardware Version:	XL-TWS26-IP5616
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
<b>Bluetooth</b>	
Radio Technology:	Bluetooth V5.3
Frequency Range:	2402-2480MHz
Max.RF Output Power:	-4.92dBm (EIRP)
Type of Modulation:	GFSK, $\pi/4$ DQPSK
Data Rate:	1Mbps, 2Mbps, 3Mbps
Quantity of Channels	79/40
Channel Separation:	1MHz/ 2MHz
Type of Antenna:	Ceramic Antenna
Antenna Gain:	2.06dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	



## 1.2 Test Standards

The tests were performed according to following standards:

**EN 55032:2015+A1:2020**: Electromagnetic compatibility of multimedia equipment - Emission requirements

**EN 55035:2017+A11:2020**: Electromagnetic compatibility of multimedia equipment - Immunity requirements.

**EN IEC 61000-3-2:2019+A1:2021**: Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase).

**EN 61000-3-3:2013+A2:2021**: Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16$  A per phase and not subject to conditional connection.

**ETSI EN 301 489-1 V2.2.3 (2019-11)**: Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for Electromagnetic Compatibility.

**Draft ETSI EN 301 489-17 V3.2.5 (2022-08)**: ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility.

***Maintenance of compliance*** is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with the standard ETSI EN 301489-1, Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements.



## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

# WALTEK



## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Charging mode	Connect to the Adapter; AC230V 50Hz for adapter
TM2	BT Connect	/
TM3	Bluetooth	TR, CR, TT, CT for EMS testing

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	0.6	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	GangQi	GQ12-050200	/
Phone	XIAOMI	MI10	/





## 1.6 Performance Criteria for EMS

### ➤ EN 301 489-17, The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time.

The equipment shall meet the minimum performance criteria as specified in the following clauses.

Table 1: Performance criteria

Criteria	During test	After test
A	Shall operate as intended. (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 3). Shall be no loss of function. Shall be no loss of stored data or user programmable
B	May show loss of function (one or more). May show degradation of performance (see note 2). Shall be no unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3).



NOTE 1: Operate as intended during the test allows a level of degradation not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 3: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

➤ **EN 55035, The performance criteria are:**

- A. The apparatus shall continue to operate as intended during and after the test. The manufacturer specifies some minimum performance level. The performance level may be specified by the manufacturer as a permissible loss of performance.
- B. The apparatus shall continue to operate as intended after the test. This indicates that the EUT does not need to function at normal performance levels during the test, but must recover. Again some minimal performance is defined by the manufacture. No change in operating state or loss or data is permitted.
- C. Temporary loss of function is allowed. Operation of the EUT may stop as long as it is either automatically reset or can be manually restored by operation of the controls.



## 1.7 Measurement Uncertainty

Measurement uncertainty	
Parameter	Uncertainty
Uncertainty for Radiated Emission in 3m chamber	@30-200MHz $\pm 4.52$ dB @0.2-1GHz $\pm 5.56$ dB @1-6GHz $\pm 3.84$ dB @6-18GHz $\pm 3.92$ dB
Uncertainty for Conducted Emission	@9-150kHz $\pm 3.74$ dB @0.15-30MHz $\pm 3.34$ dB
Uncertainty for Harmonic test	3.26%
Uncertainty for Flicker test	4.76%
Uncertainty for RS test	21%, k=2
Uncertainty for CS test	29%, k=2
Uncertainty for ESD test	The immunity measurement system uncertainty is within standard requirement and is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.
Uncertainty for EFT test	
Uncertainty for Surges test	
Uncertainty for Voltage Dips, Voltage Variations and Short Interruptions Test	
Uncertainty for PFMF test	



## 1.8 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
<input type="checkbox"/> Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-02-25	2024-02-24
Amplifier	HP	8447F	2805A03475	2023-02-25	2024-02-24
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
<input type="checkbox"/> Chamber A: Above 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2023-02-25	2024-02-24
Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-02-25	2024-02-24
Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
<input type="checkbox"/> Chamber B: Below 1GHz					
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
Amplifier	Agilent	8447D	2944A10179	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
Amplifier	HP	8447F	2944A03869	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Chamber C: Above 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
Horn Antenna	POAM	RTF-11A	LP228060221	2023-03-10	2026-03-09
Amplifier	Tonscend	TAP01018050	AP22E806235	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Conducted Room 1#					
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
8-WIRE LISN	Schwarz beck	8158	CAT3-8158-0059	2023-02-25	2024-02-24
8-WIRE LISN	Schwarz beck	8158	CAT5-8158-0117	2023-02-25	2024-02-24
<input type="checkbox"/> Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2023-02-25	2024-02-24
LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24



<b>EMF</b>					
VDH Test Head	AFJ	VDH 30	SC022Z	2023-02-25	2024-02-24
<b>3 Loop Antenna</b>					
Loop Antenna	ZHINAN	ZN30401	19037	2023-02-25	2025-02-24
<b>Clamp</b>					
Clamp	Luthi	MDS21	3809	2023-02-27	2024-02-26
<b>PFMF</b>					
PMF Generator	LIONCEL	PMF-801C-C	0171101	2023-02-25	2024-02-24
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2023-02-25	2024-02-24
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2023-02-25	2024-02-24
<b>H/F</b>					
Digital Power Analyzer	California Instrument	CTS	72831	2023-02-25	2024-02-24
Power Source	California Instrument	5001IX-CTS-400	25965	2023-02-25	2024-02-24
<b>ESD</b>					
ESD Generator	LIONCEL	ESD-203B	0170901	2023-03-14	2024-03-13
<b>EFT/SURGE/DIPS</b>					
Transient 2000	EMC PARTNER	TRA2000	863	2023-02-25	2024-02-24
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2023-02-25	2024-02-24
<b>CS</b>					
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2023-02-25	2024-02-24
Attenuator	EMTEST	MA-5100/6BF2	1009	2023-02-25	2024-02-24
CDN	Luthi	L-801M2/M3	2665	2023-02-25	2024-02-24
CDN	LIONCEL	CDN-T8	0210401	2023-02-25	2024-02-24
EM Clamp	TESEQ	KEMZ801A	45028	2023-02-25	2024-02-24
<b>RS</b>					
Signal Generator	HP	8688B	3438A00604	2023-02-25	2024-02-24
Power Meter	KEITHLEY	3500	1162591	2023-02-25	2024-02-24
Power Meter	KEITHLEY	3500	1121428	2023-02-25	2024-02-24
RF Power Amplifier	MicoTop	MPA-80-1000-25 0	MPA1906239	2023-02-25	2024-02-24
RF Power Amplifier	MicoTop	MPA-80-6000-10 0	MPA1906238	2023-02-25	2024-02-24
Antenna	SCHWARZBECK	STLP 9129	9129 114	N/A	N/A
Power Meter	Agilent	E4419B	GB42420578	2023-02-25	2024-02-24



Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

# WALTEK



## 2. SUMMARY OF TEST RESULTS

Standards	Reference	Description of Test Item	Result
ETSI EN 301 489-1	8.2	Radiated Emissions	Pass
	8.3	Conducted Emissions for DC Power Port	N/A
	8.4	Conducted Emissions for AC Power Port	Pass
	8.5	Harmonic Current Emissions	Pass
	8.6	Voltage Fluctuations and Flicker	Pass
	8.7	Telecommunication Ports	N/A
	9.2	Radio Frequency Electromagnetic Field	Pass
	9.3	Electrostatic Discharge	Pass
	9.4	Fast Transients, Common Mode	Pass
	9.5	Radio Frequency, Common Mode	Pass
	9.6	Transient and Surges in the Vehicular Environment	N/A
	9.7	Voltage Dips and Interruptions	Pass
9.8	Surges	Pass	


Pass: The EUT complies with the essential requirements in the standard.  
 Fail: The EUT does not comply with the essential requirements in the standard.  
 N/A: Not applicable.

### 3. Conducted Emissions

#### 3.1 Test Procedure

Test is conducting under the description of EN55032 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

#### 3.2 Basic Test Setup Block Diagram

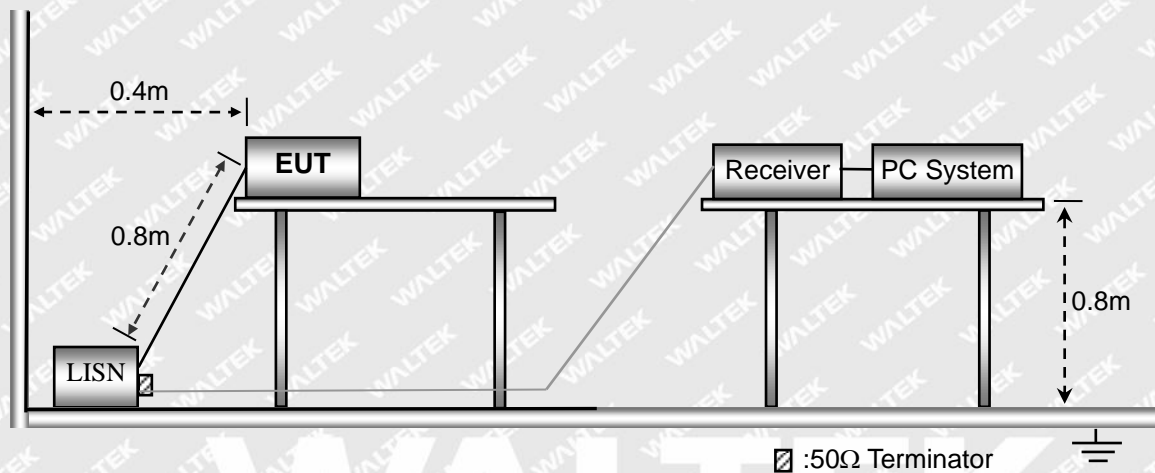

#### 3.3 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54 %
ATM Pressure:	1015 mbar


#### 3.4 Conducted Emissions Test Data

Note: Only show the worst case in the test report






Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

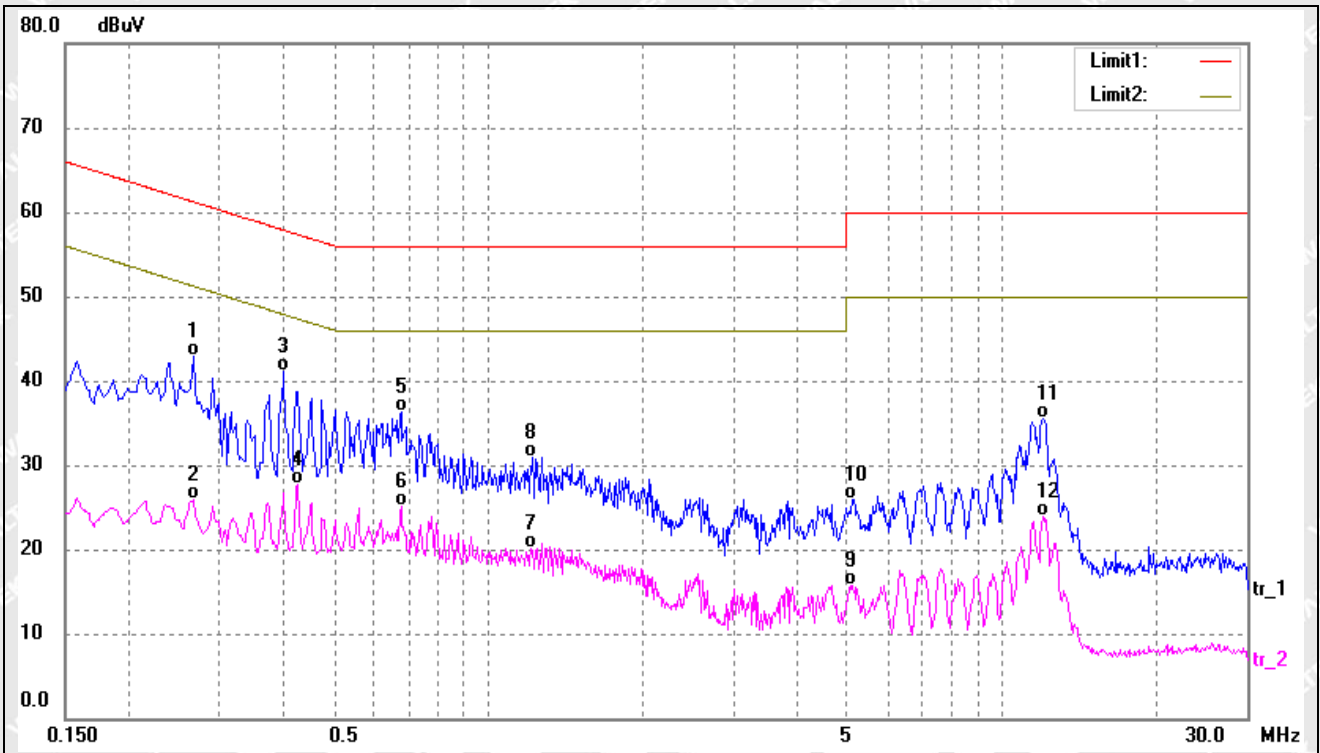

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2660	32.58	10.33	42.91	61.24	-18.33	QP
2	0.2660	15.57	10.33	25.90	51.24	-25.34	AVG
3*	0.3980	30.85	10.27	41.12	57.90	-16.78	QP
4	0.4260	17.49	10.25	27.74	47.33	-19.59	AVG
5	0.6780	26.13	10.20	36.33	56.00	-19.67	QP
6	0.6780	14.91	10.20	25.11	46.00	-20.89	AVG
7	1.2140	9.83	10.18	20.01	46.00	-25.99	AVG
8	1.2180	20.79	10.18	30.97	56.00	-25.03	QP
9	5.0780	5.39	10.38	15.77	50.00	-34.23	AVG
10	5.1300	15.49	10.38	25.87	60.00	-34.13	QP
11	12.0580	25.25	10.32	35.57	60.00	-24.43	QP
12	12.0580	13.55	10.32	23.87	50.00	-26.13	AVG



Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

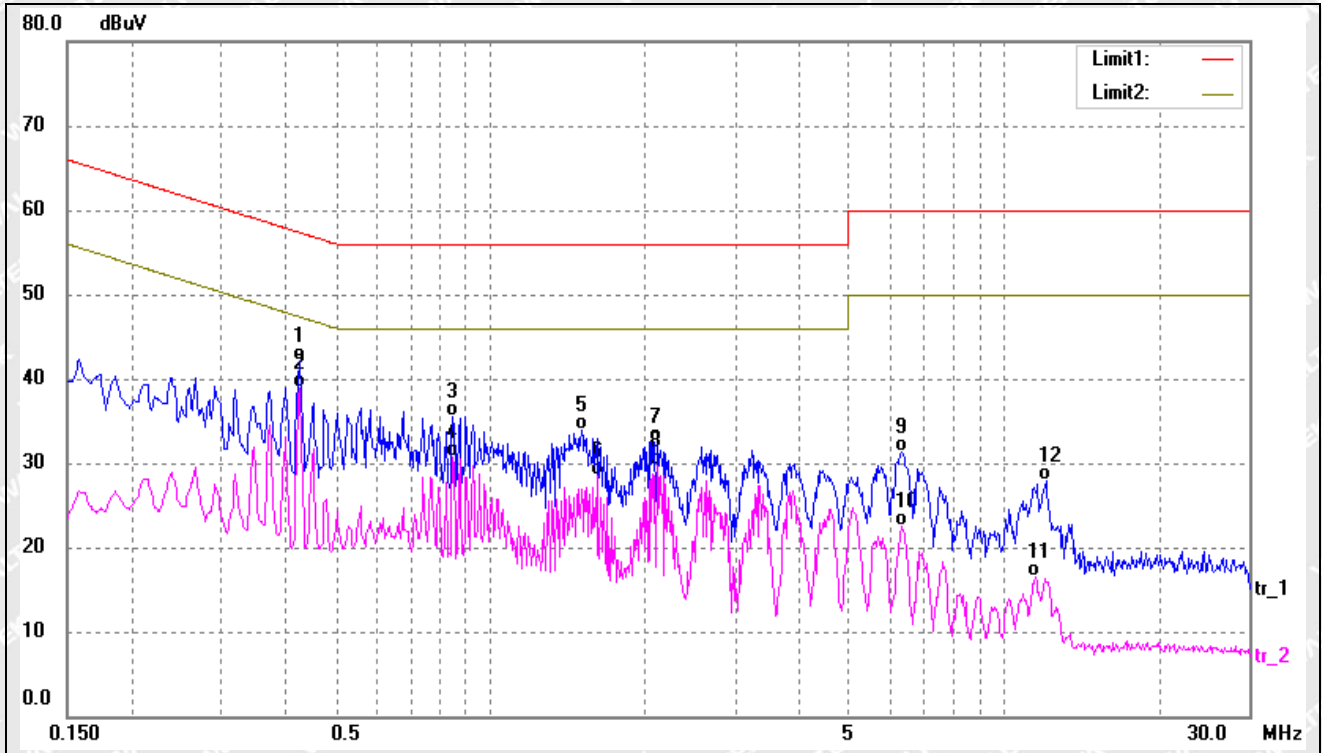


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4260	31.89	10.25	42.14	57.33	-15.19	QP
2*	0.4260	28.63	10.25	38.88	47.33	-8.45	AVG
3	0.8460	25.37	10.17	35.54	56.00	-20.46	QP
4	0.8460	20.51	10.17	30.68	46.00	-15.32	AVG
5	1.5100	23.69	10.24	33.93	56.00	-22.07	QP
6	1.6140	18.19	10.26	28.45	46.00	-17.55	AVG
7	2.0900	22.25	10.33	32.58	56.00	-23.42	QP
8	2.1180	19.31	10.33	29.64	46.00	-16.36	AVG
9	6.3260	20.87	10.38	31.25	60.00	-28.75	QP
10	6.3260	12.03	10.38	22.41	50.00	-27.59	AVG
11	11.5380	6.18	10.33	16.51	50.00	-33.49	AVG
12	12.1180	17.66	10.31	27.97	60.00	-32.03	QP

## 4. Radiated Emissions

### 4.1 Test Procedure

Test is conducting under the description of EN55032 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

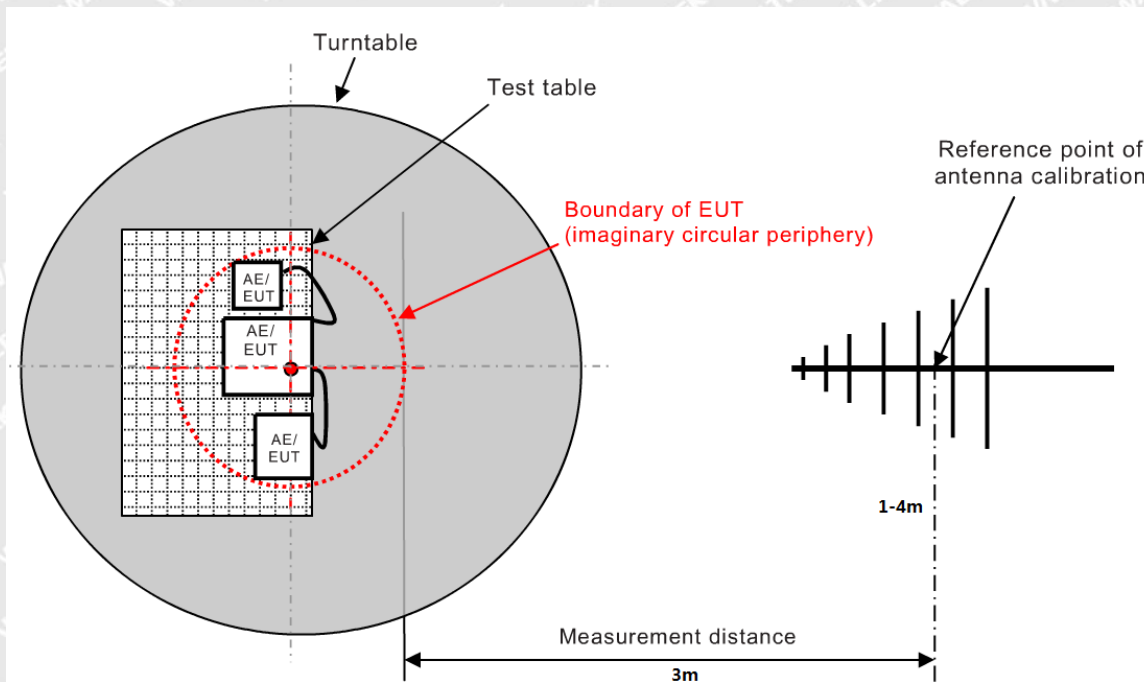

### 4.2 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit for Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{EN 301489 Class B Limit}$$



### 4.3 Environmental Conditions


Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 4.4 Summary of Test Results/Plots

Note: Only show the worst case in the test report

➤ 30MHz to 1GHz


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

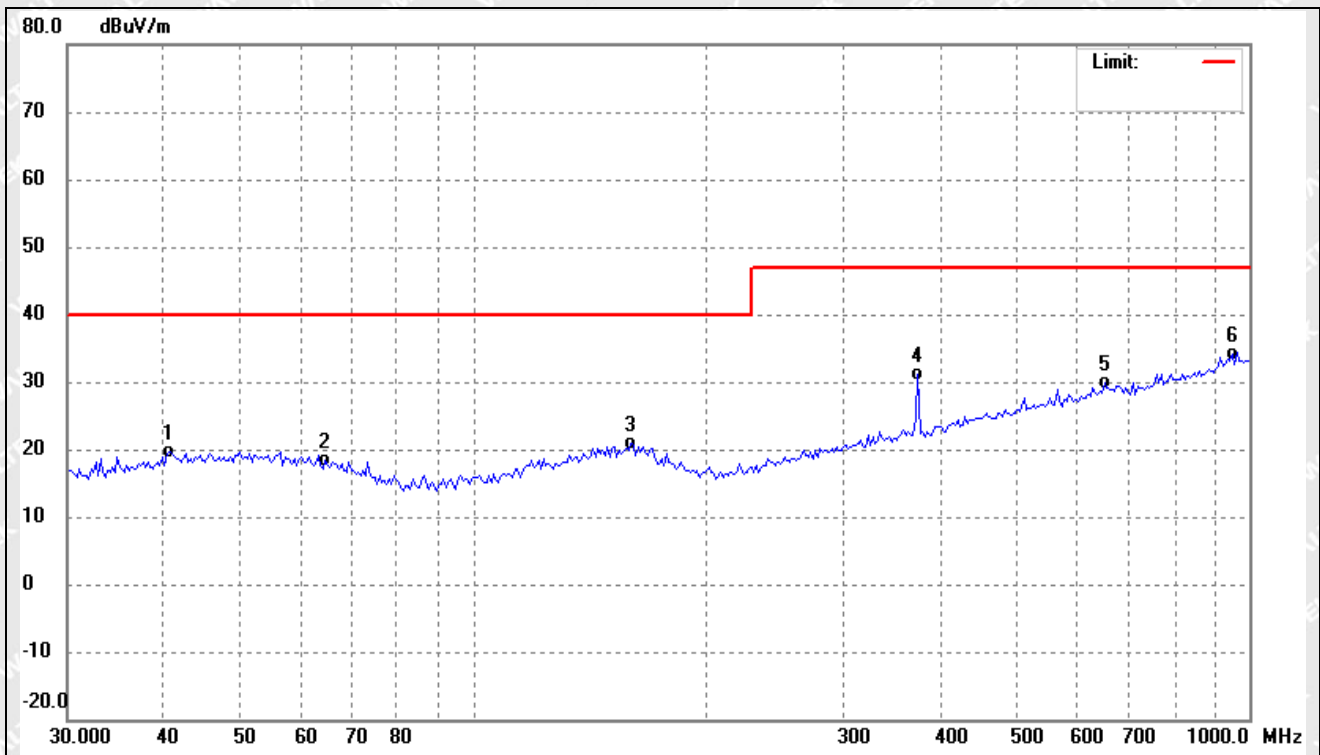

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	40.5837	28.12	-8.48	19.64	40.00	-20.36	-	-	peak
2	64.5319	28.04	-9.76	18.28	40.00	-21.72	-	-	peak
3	159.7586	29.41	-8.61	20.80	40.00	-19.20	-	-	peak
4	373.8862	37.54	-6.50	31.04	47.00	-15.96	-	-	peak
5	651.3831	31.09	-1.30	29.79	47.00	-17.21	-	-	peak
6	952.0001	31.87	2.25	34.12	47.00	-12.88	-	-	peak




Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

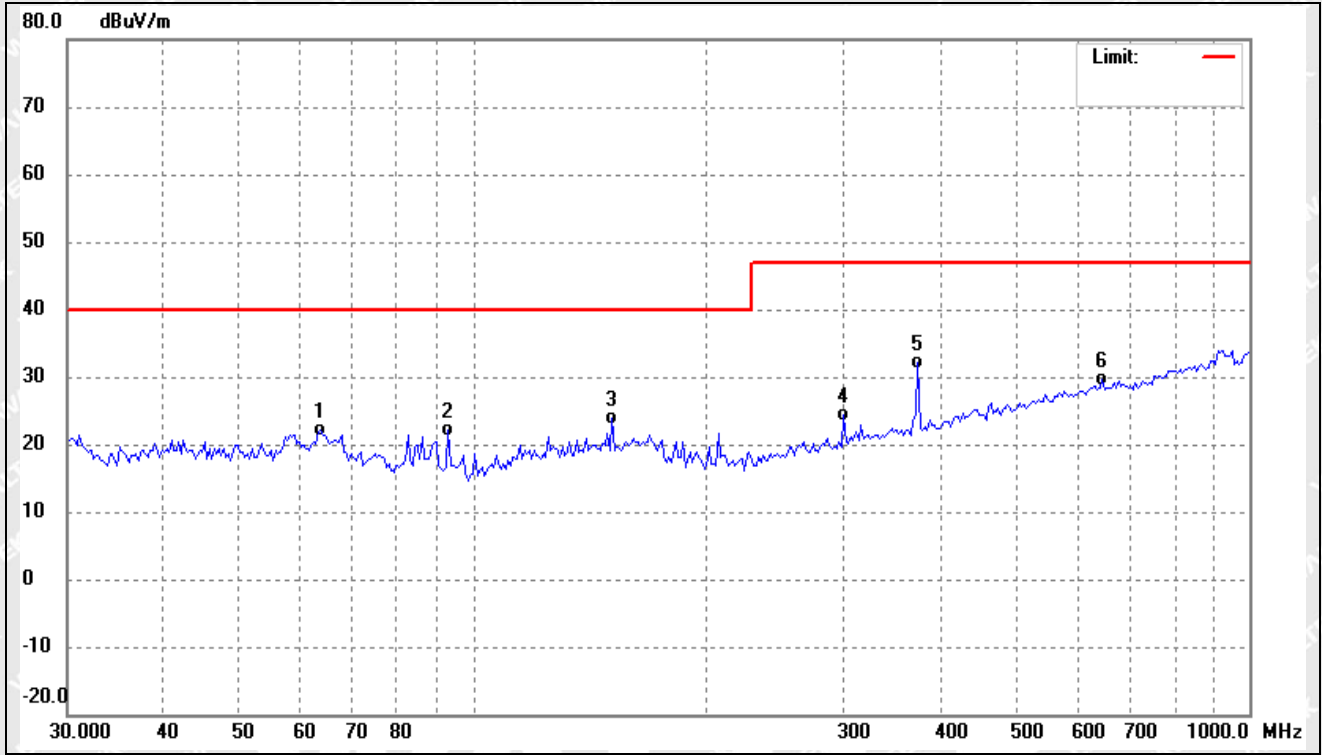

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	63.6312	31.66	-9.59	22.07	40.00	-17.93	-	-	QP
2	92.9974	35.00	-12.93	22.07	40.00	-17.93	-	-	QP
3	151.0252	32.41	-8.61	23.80	40.00	-16.20	-	-	QP
4	300.6988	32.61	-8.24	24.37	47.00	-22.63	-	-	QP
5	373.8862	38.51	-6.50	32.01	47.00	-14.99	-	-	QP
6	646.8217	30.95	-1.32	29.63	47.00	-17.37	-	-	QP




Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

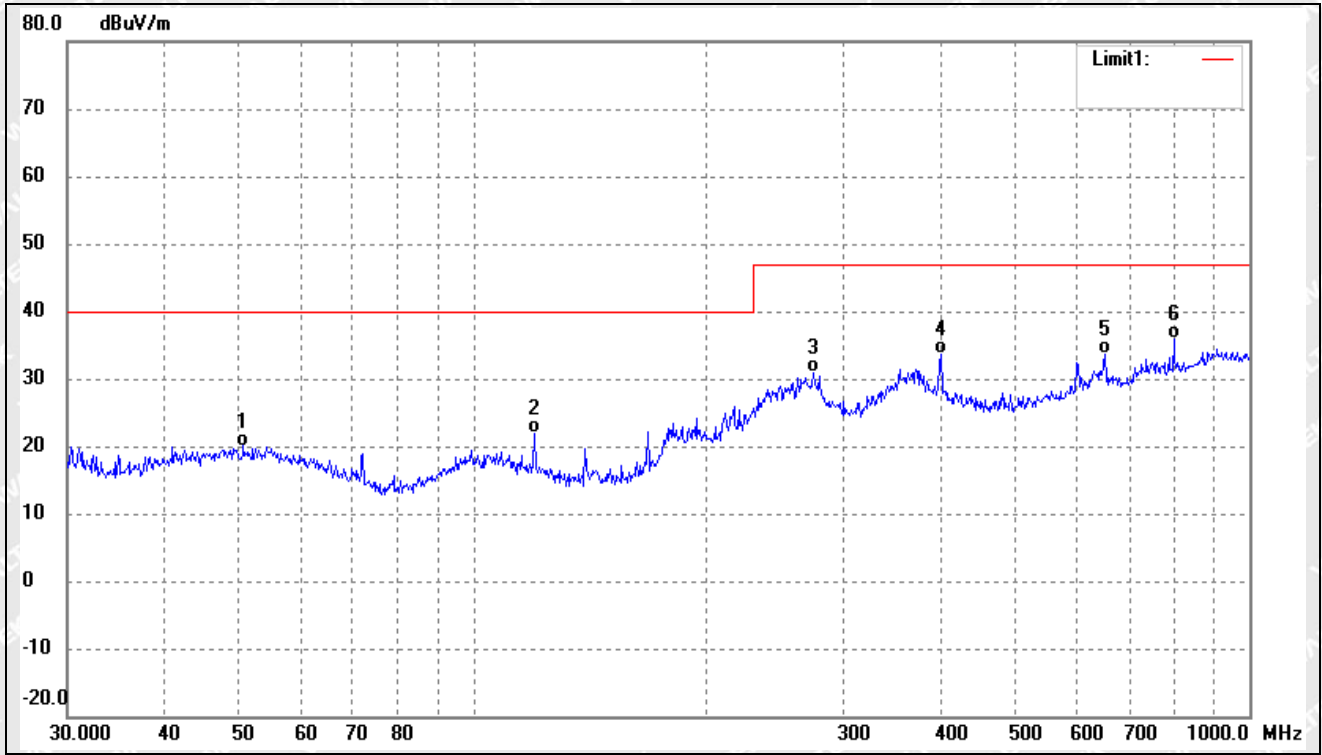

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.5860	27.35	-7.35	20.00	40.00	-20.00	-	-	QP
2	119.8556	32.02	-10.11	21.91	40.00	-18.09	-	-	QP
3	274.1939	36.60	-5.69	30.91	47.00	-16.09	-	-	QP
4	400.4319	36.09	-2.53	33.56	47.00	-13.44	-	-	QP
5	651.9417	31.56	2.02	33.58	47.00	-13.42	-	-	QP
6	798.9797	31.83	4.05	35.88	47.00	-11.12	-	-	QP



Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

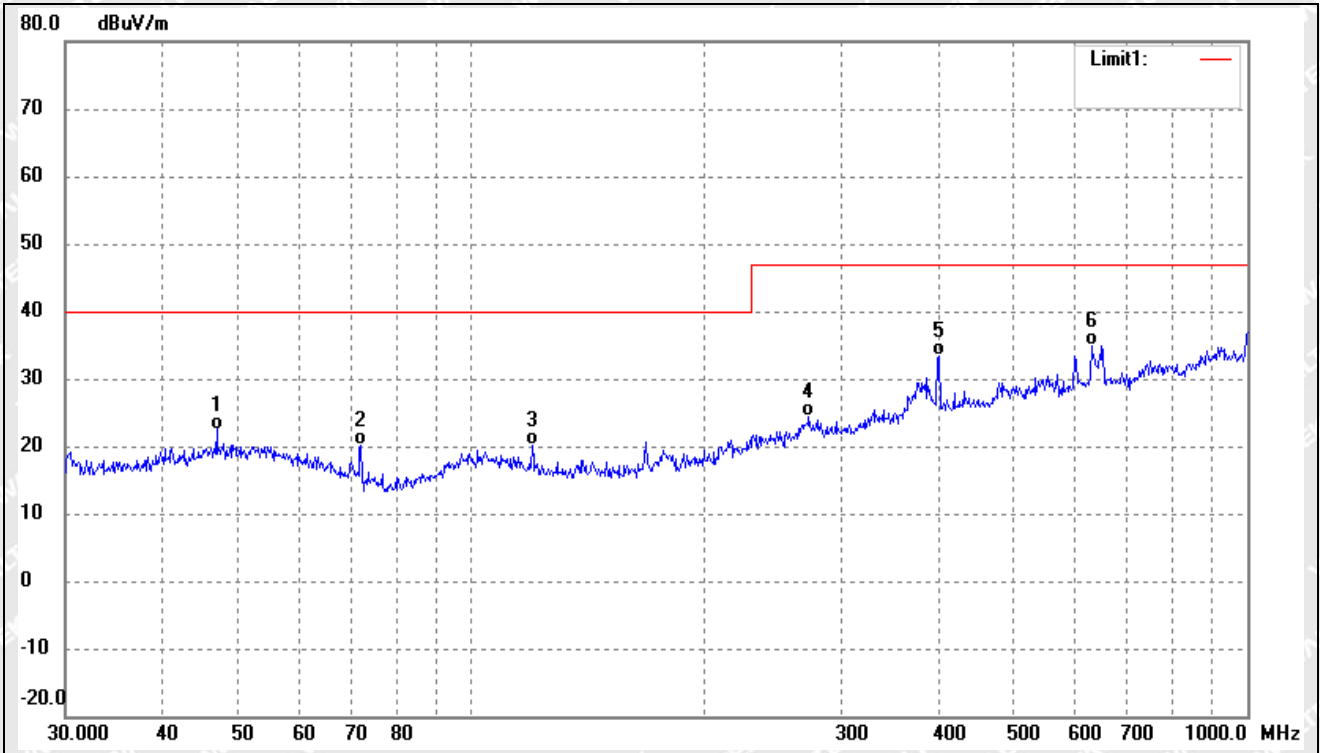


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.9948	30.00	-7.50	22.50	40.00	-17.50	-	-	QP
2	72.0843	32.06	-11.98	20.08	40.00	-19.92	-	-	QP
3	119.8556	30.16	-10.11	20.05	40.00	-19.95	-	-	QP
4	272.2776	30.09	-5.81	24.28	47.00	-22.72	-	-	QP
5	400.4319	35.94	-2.53	33.41	47.00	-13.59	-	-	QP
6	629.4772	33.46	1.53	34.99	47.00	-12.01	-	-	QP



➤ Above 1GHz

Test mode:	TM1(worst case)	Polarity:	Horizontal
------------	-----------------	-----------	------------

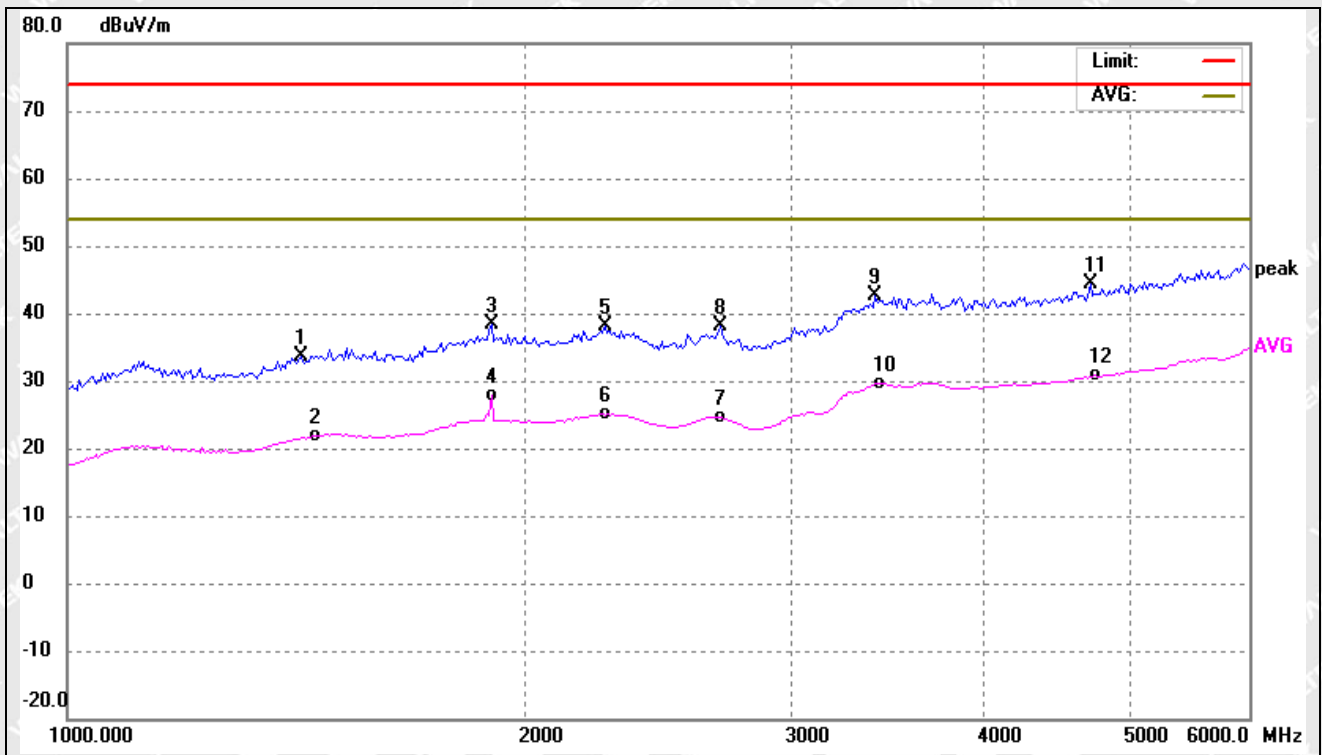


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	1426.864	56.53	-22.84	33.69	74.00	-40.31	-	-	peak
2	1452.713	44.76	-22.76	22.00	54.00	-32.00	-	-	AVG
3	1901.676	58.63	-20.21	38.42	74.00	-35.58	-	-	peak
4	1901.676	47.99	-20.21	27.78	54.00	-26.22	-	-	AVG
5	2259.377	57.26	-19.12	38.14	74.00	-35.86	-	-	peak
6	2267.504	44.30	-19.11	25.19	54.00	-28.81	-	-	AVG
7	2684.361	43.02	-18.27	24.75	54.00	-29.25	-	-	AVG
8	2694.017	56.36	-18.26	38.10	74.00	-35.90	-	-	peak
9	3402.222	57.50	-14.86	42.64	74.00	-31.36	-	-	peak
10	3439.069	44.35	-14.62	29.73	54.00	-24.27	-	-	AVG
11	4717.045	57.23	-12.78	44.45	74.00	-29.55	-	-	peak
12	4751.042	43.50	-12.74	30.76	54.00	-23.24	-	-	AVG





Test mode:	TM1(worst case)	Polarity:	Vertical
------------	-----------------	-----------	----------

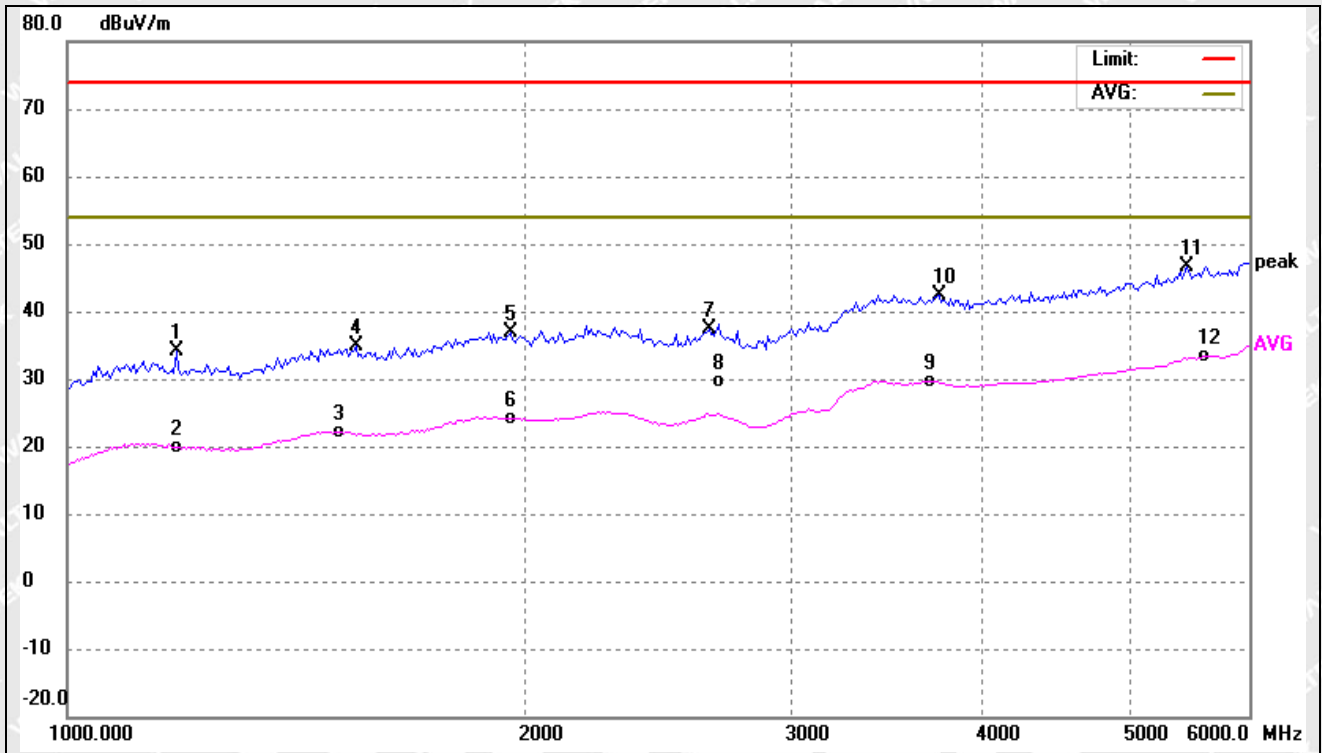


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	1179.596	57.90	-23.89	34.01	74.00	-39.99	-	-	peak
2	1183.839	43.85	-23.86	19.99	54.00	-34.01	-	-	AVG
3	1533.102	44.44	-22.40	22.04	54.00	-31.96	-	-	AVG
4	1549.706	57.09	-22.30	34.79	74.00	-39.21	-	-	peak
5	1957.094	56.84	-19.88	36.96	74.00	-37.04	-	-	peak
6	1964.134	44.05	-19.84	24.21	54.00	-29.79	-	-	AVG
7	2646.081	55.74	-18.36	37.38	74.00	-36.62	-	-	peak
8	2684.361	47.84	-18.27	29.57	54.00	-24.43	-	-	AVG
9	3668.686	44.05	-14.39	29.66	54.00	-24.34	-	-	AVG
10	3748.582	56.94	-14.49	42.45	74.00	-31.55	-	-	peak
11	5465.203	56.71	-10.10	46.61	74.00	-27.39	-	-	peak
12	5604.311	43.10	-9.69	33.41	54.00	-20.59	-	-	AVG

Remark: '- Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.



## 5. Harmonic Current Emissions

### 5.1 Test Setup Block Diagram

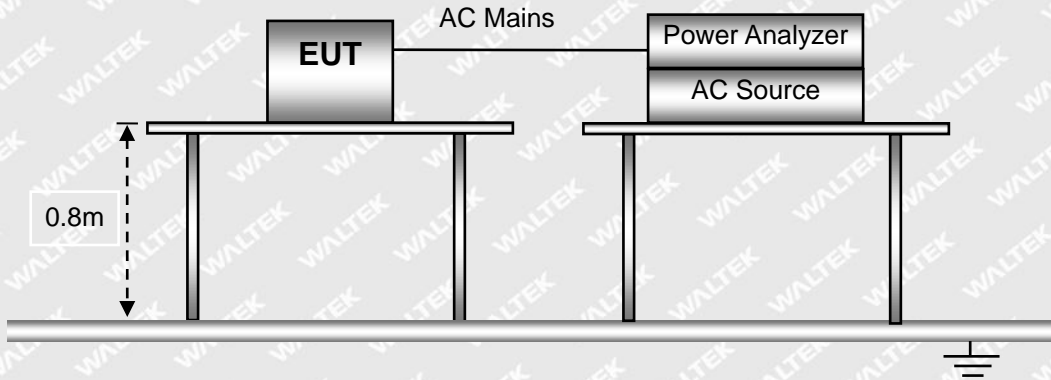

### 5.2 Test Standards

EN IEC 61000-3-2, Clause 7.2 Limits for Class A equipment.

### 5.3 Environmental Conditions


Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	1015 mbar

### 5.4 Harmonic Current Emissions Test Data




### Harmonics – Class-A

**Test category:** Class-A (European limits)      **Test Margin:** 100  
**Test date:** 2023/7/6      **Start time:** 9:17:17      **End time:** 9:19:58  
**Test duration (min):** 2.5      **Data file name:** H-000571.cts\_data  
**Comment:** TM1  
**Test Result:** Pass      **Source qualification:** Normal  
**Current & voltage waveforms** -

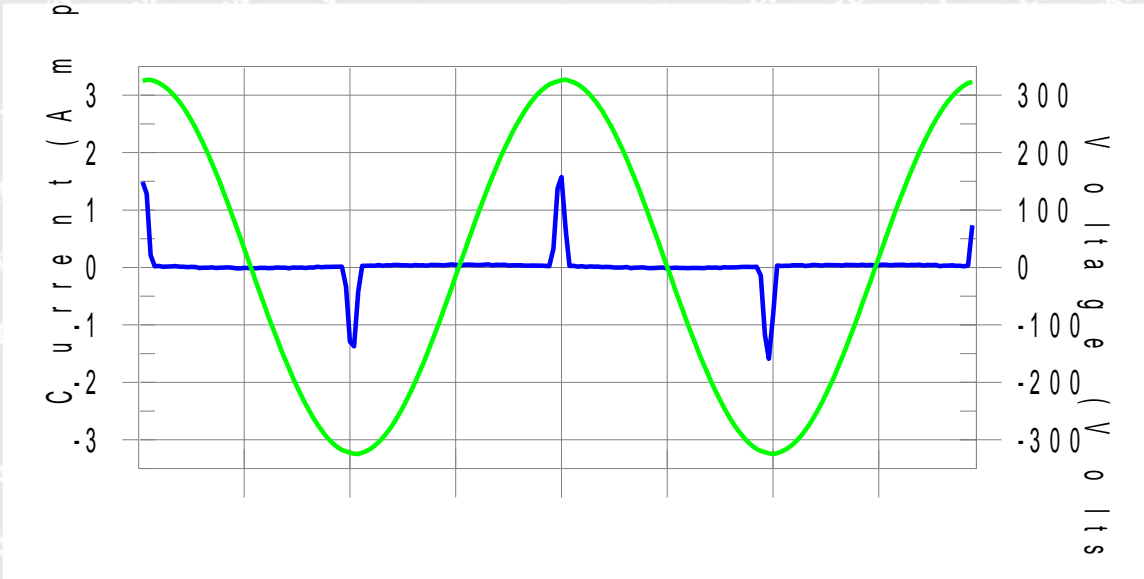

Harmonics and Class A limit line      European Limits

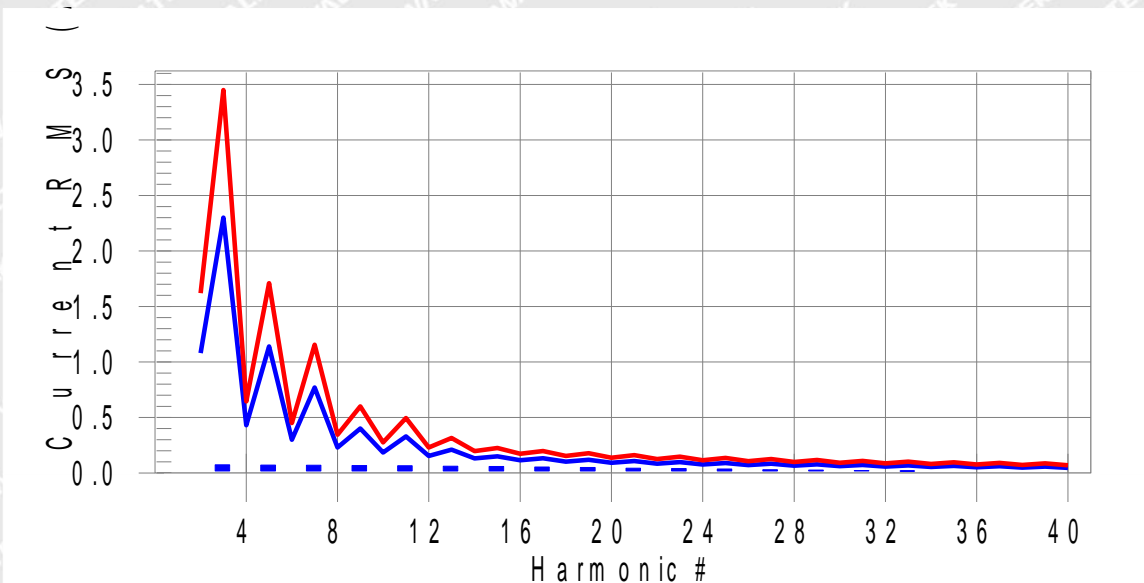

**Test result:** Pass      **Worst harmonics H19-31.5% of 150% limit, H21-41.6% of 100% limit**



## Current Test Result Summary (Run time)

**Test category: Class-A (European limits)**      **Test Margin: 100**  
**Test date: 2023/7/6**      **Start time: 9:17:17**      **End time: 9:19:58**  
**Test duration (min): 2.5**      **Data file name: H-000571.cts\_data**  
**Comment: TM1**

**Test Result: Pass**      **Source qualification: Normal**  
**THC(A): 0.210**      **I-THD(%): 231.8**      **POHC(A): 0.088**      **POHC Limit(A): 0.251**

### Highest parameter values during test:

**V\_RMS (Volts): 230.14**      **Frequency(Hz): 50.00**  
**I\_Peak (Amps): 1.657**      **I\_RMS (Amps): 0.288**  
**I\_Fund (Amps): 0.091**      **Crest Factor: 6.523**  
**Power (Watts): 20.2**      **Power Factor: 0.342**

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.004	1.620	N/A	Pass
3	0.073	2.300	3.2	0.085	3.450	2.5	Pass
4	0.002	0.430	N/A	0.004	0.645	N/A	Pass
5	0.072	1.140	6.3	0.085	1.710	4.9	Pass
6	0.002	0.300	N/A	0.004	0.450	N/A	Pass
7	0.070	0.770	9.1	0.082	1.155	7.1	Pass
8	0.002	0.230	N/A	0.004	0.345	N/A	Pass
9	0.067	0.400	16.9	0.079	0.600	13.2	Pass
10	0.002	0.184	N/A	0.004	0.276	N/A	Pass
11	0.064	0.330	19.5	0.075	0.495	15.2	Pass
12	0.002	0.153	N/A	0.004	0.230	N/A	Pass
13	0.061	0.210	29.1	0.071	0.315	22.6	Pass
14	0.002	0.131	N/A	0.004	0.197	N/A	Pass
15	0.057	0.150	38.3	0.066	0.225	29.5	Pass
16	0.002	0.115	N/A	0.003	0.173	N/A	Pass
17	0.053	0.132	40.4	0.061	0.198	31.0	Pass
18	0.002	0.102	N/A	0.003	0.153	N/A	Pass
19	0.049	0.118	41.4	0.056	0.178	31.5	Pass
20	0.002	0.092	N/A	0.003	0.138	N/A	Pass
21	0.045	0.107	41.6	0.050	0.161	31.4	Pass
22	0.002	0.084	N/A	0.003	0.125	N/A	Pass
23	0.040	0.098	40.8	0.045	0.147	30.5	Pass
24	0.002	0.077	N/A	0.003	0.115	N/A	Pass
25	0.035	0.090	39.3	0.039	0.135	28.9	Pass
26	0.002	0.071	N/A	0.003	0.107	N/A	Pass



Reference No.: WTF23X06138827W003

27	0.031	0.083	37.0	0.034	0.125	26.8	Pass
28	0.002	0.066	N/A	0.002	0.099	N/A	Pass
29	0.026	0.078	34.0	0.028	0.116	24.3	Pass
30	0.001	0.061	N/A	0.002	0.092	N/A	Pass
31	0.022	0.073	30.5	0.023	0.109	21.3	Pass
32	0.001	0.058	N/A	0.002	0.086	N/A	Pass
33	0.018	0.068	26.6	0.019	0.102	18.2	Pass
34	0.001	0.054	N/A	0.002	0.081	N/A	Pass
35	0.014	0.064	22.5	0.015	0.096	15.2	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.011	0.061	18.3	0.011	0.091	12.5	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.008	0.058	14.1	0.009	0.087	10.0	Pass
40	0.000	0.046	N/A	0.001	0.069	N/A	Pass

WALTEK



## Voltage Source Verification Data (Run time)

**Test category: Class-A (European limits)**      **Test Margin: 100**  
**Test date: 2023/7/6**      **Start time: 9:17:17**      **End time: 9:19:58**  
**Test duration (min): 2.5**      **Data file name: H-000571.cts\_data**  
**Comment: TM1**

**Test Result: Pass**      **Source qualification: Normal**

### Highest parameter values during test:

**Voltage (Vrms): 230.14**      **Frequency(Hz): 50.00**  
**I\_Peak (Amps): 1.657**      **I\_RMS (Amps): 0.288**  
**I\_Fund (Amps): 0.091**      **Crest Factor: 6.523**  
**Power (Watts): 20.2**      **Power Factor: 0.342**

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.058	0.460	12.58	OK
3	0.523	2.071	25.27	OK
4	0.078	0.460	16.97	OK
5	0.048	0.920	5.25	OK
6	0.037	0.460	8.10	OK
7	0.038	0.690	5.44	OK
8	0.013	0.460	2.87	OK
9	0.049	0.460	10.57	OK
10	0.010	0.460	2.20	OK
11	0.046	0.230	20.20	OK
12	0.010	0.230	4.30	OK
13	0.057	0.230	24.88	OK
14	0.007	0.230	3.13	OK
15	0.049	0.230	21.51	OK
16	0.008	0.230	3.31	OK
17	0.060	0.230	26.23	OK
18	0.011	0.230	4.84	OK
19	0.056	0.230	24.15	OK
20	0.014	0.230	6.06	OK
21	0.056	0.230	24.22	OK
22	0.007	0.230	2.90	OK
23	0.052	0.230	22.42	OK
24	0.006	0.230	2.41	OK
25	0.049	0.230	21.37	OK
26	0.004	0.230	1.74	OK
27	0.042	0.230	18.33	OK



Reference No.: WTF23X06138827W003


28	0.003	0.230	1.23	OK
29	0.042	0.230	18.06	OK
30	0.005	0.230	2.28	OK
31	0.035	0.230	15.20	OK
32	0.003	0.230	1.21	OK
33	0.030	0.230	13.08	OK
34	0.003	0.230	1.46	OK
35	0.026	0.230	11.23	OK
36	0.003	0.230	1.32	OK
37	0.021	0.230	9.18	OK
38	0.003	0.230	1.34	OK
39	0.018	0.230	7.94	OK
40	0.008	0.230	3.38	OK

**WALTEK**



## 6. Voltage Fluctuation and Flicker

### 6.1 Test Setup Block Diagram

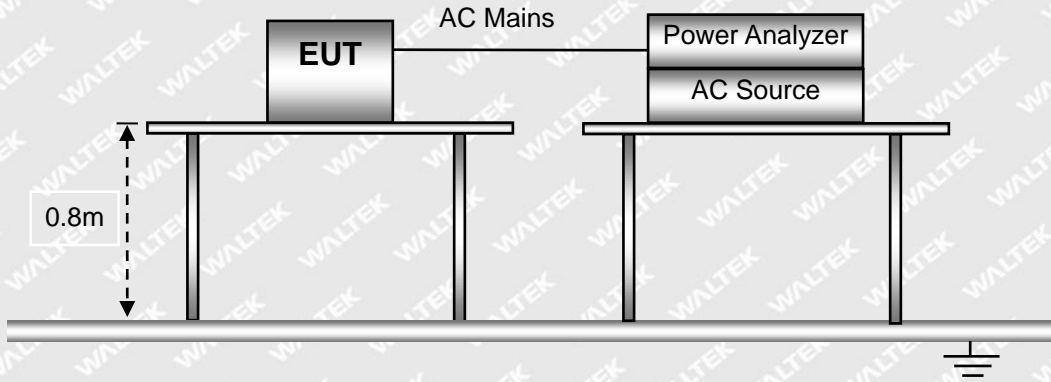

### 6.2 Test Standards

EN 61000-3-3, Limit: Clause 5.

### 6.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	1015 mbar

### 6.4 Voltage Fluctuation and Flicker Test Data






Test mode:	TM1(worst case)
------------	-----------------

**Test Result: Pass**

**Status: Test Completed**

**Pst<sub>i</sub> and limit line**

**European Limits**

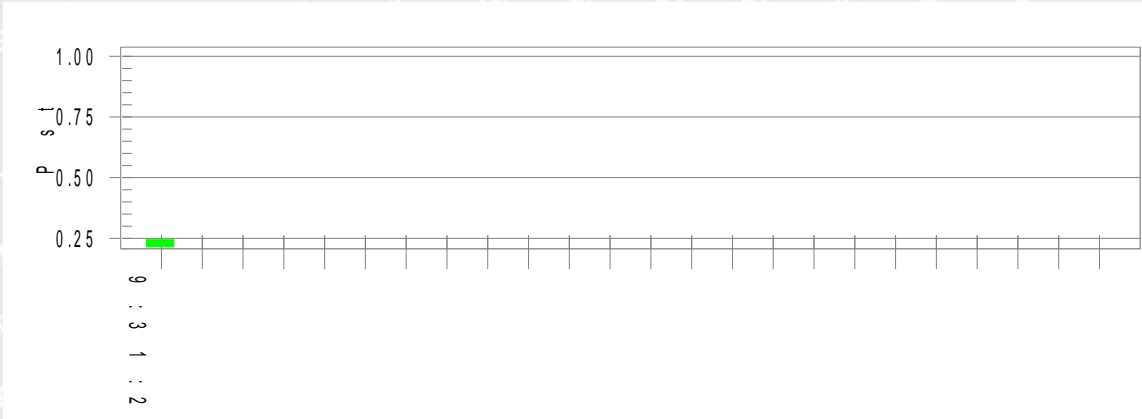

**Plt and limit line**




**Parameter values recorded during the test:**

<b>Vrms at the end of test (Volt):</b>	<b>230.04</b>		
<b>Highest dt (%):</b>		<b>Test limit (%):</b>	
<b>T-max (mS):</b>	<b>0</b>	<b>Test limit (mS):</b>	<b>500.0 Pass</b>
<b>Highest dc (%):</b>	<b>0.00</b>	<b>Test limit (%):</b>	<b>3.30 Pass</b>
<b>Highest dmax (%):</b>	<b>0.00</b>	<b>Test limit (%):</b>	<b>4.00 Pass</b>
<b>Highest Pst (10 min. period):</b>	<b>0.244</b>	<b>Test limit:</b>	<b>1.000 Pass</b>
<b>Highest Plt (2 hr. period):</b>	<b>0.107</b>	<b>Test limit:</b>	<b>0.650 Pass</b>



## 7. Electrostatic Discharge (ESD)

### 7.1 Test Setup Block Diagram

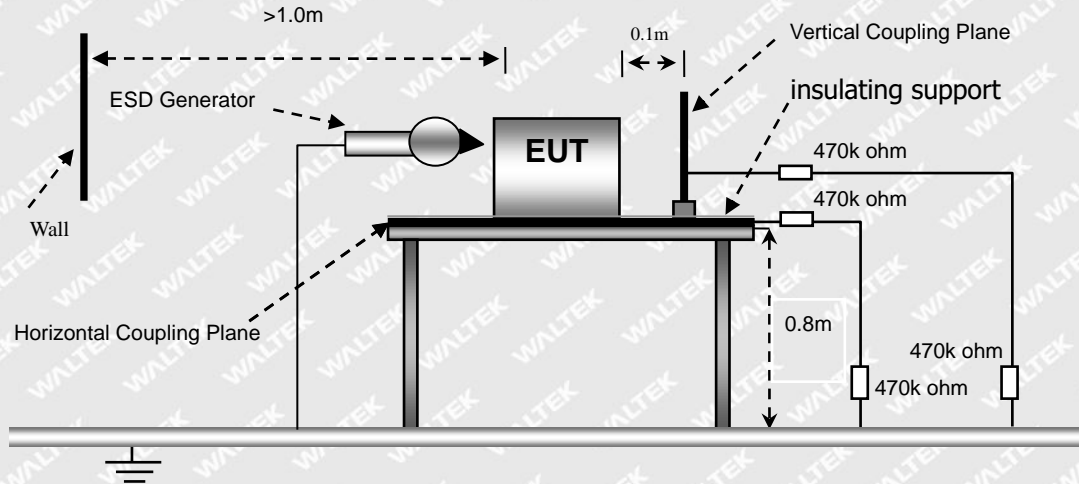

### 7.2 Test Performance

Required Performance Criterion:	B
Mode:	TM1-TM3
Note:	TM3 for TT,TR

### 7.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

### 7.4 Electrostatic Discharge Immunity Test Data



Test mode	TM1-TM3							
	Test Levels (kV)							
Test Points	-2	+2	-4	+4	-6	+6	-8	+8
<b>Air Discharge</b>								
Gap	A	A	A	A	A	A	A	A
Screen	A	A	A	A	A	A	A	A
Enclosure	A	A	A	A	A	A	A	A
<b>Direct Contact Discharge</b>								
USB Port	A	A	A	A	/	/	/	/
<b>Indirect Contact Discharge</b>								
HCP (6 Sides)	A	A	A	A	/	/	/	/
VCP (4 Sides)	A	A	A	A	/	/	/	/


Test Result: Pass

# WALTEK



## 8. Radio Frequency Electromagnetic Field (R/S)

### 8.1 Test Setup Block Diagram

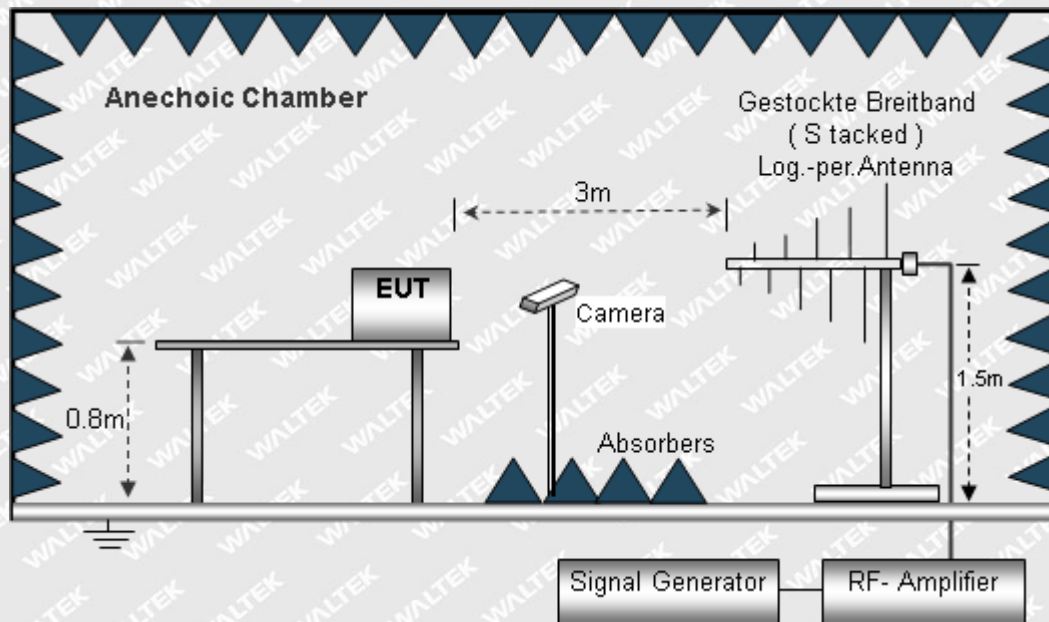

### 8.2 Test Performance

Required Performance Criterion:	A
Mode:	TM1-TM3
Note: TM3 for CT,CR	

### 8.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1010 mbar

### 8.4 Continuous Radiated Disturbances Test Data

Frequency step: 1% of fundamental

Dwell time: 1 second

Modulation: AM by 1kHz sine wave with 80% modulation depth



Test mode		TM1-TM3							
Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A
1000-3000	3	A	A	A	A	A	A	A	A
3000-6000	3	A	A	A	A	A	A	A	A

Test Result: Pass


**WALTEK**




## 9. Fast Transients, Common Mode (EFT)

### 9.1 Test Setup Block Diagram

For AC Mains or DC Ports:

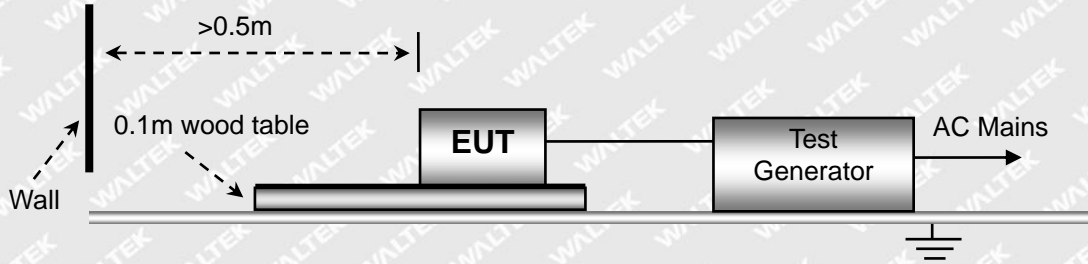

For Signal or Telecommunication Ports:

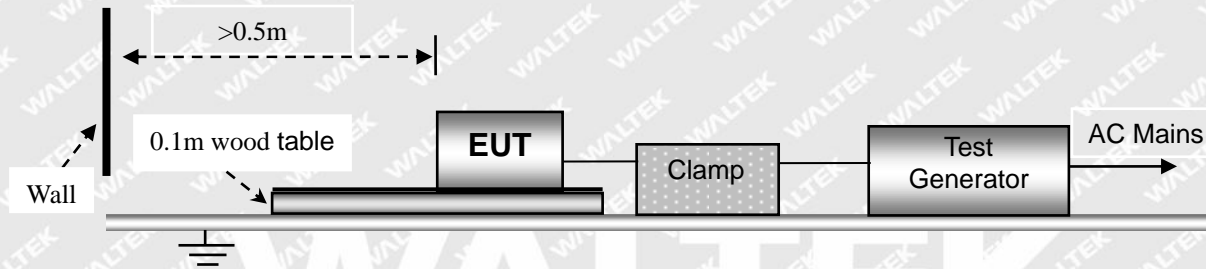

### 9.2 Test Performance

Required Performance Criterion:	B
Mode:	TM1-TM3
Note: TM3 for TT, TR	

### 9.3 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

### 9.4 Electrical Fast Transients Test Data



Test Mode		TM1-TM3							
Test Line		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
AC Main Power port	L	A	A	A	A	/	/	/	/
	N	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L-N	A	A	A	A	/	/	/	/
	L-PE	/	/	/	/	/	/	/	/
	N-PE	/	/	/	/	/	/	/	/
	L-N-PE	/	/	/	/	/	/	/	/
Signal ports	/	/	/	/	/	/	/	/	


Test Result: Pass




## 10. Surges

### 10.1 Test Setup Block Diagram

For AC Mains or DC Ports:

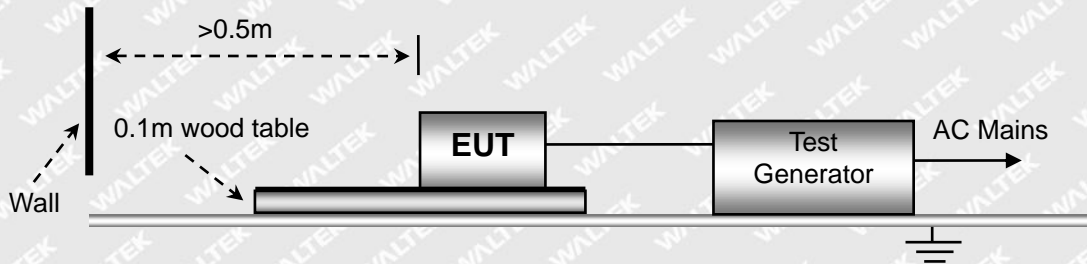

For Signal or Telecommunication Ports:

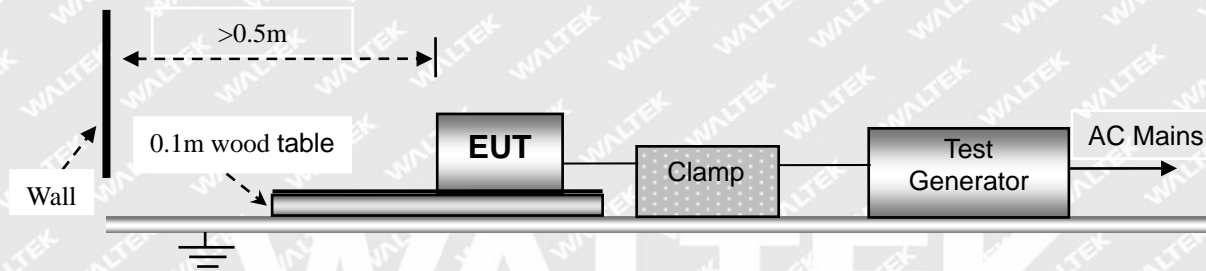

### 10.2 Test Performance

Required Performance Criterion:	B
Mode:	TM1-TM3
Note: TM3 for TT, TR	

### 10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

### 10.4 Surge Test Data





Test Mode	TM1-TM3			
Voltage	Poll	Path	Pass	Fail
0.5kV	±	L-N	A	/
1kV	±	L-N	A	/
2kV	±	L-N, L-PE, N-PE	/	/
4kV	±	L-N, L-PE, N-PE	/	/

Test Result: Pass


# WALTEK




## 11. Radio Frequency, Common Mode (C/S)

### 11.1 Test Setup Block Diagram

For AC Mains or DC Input:

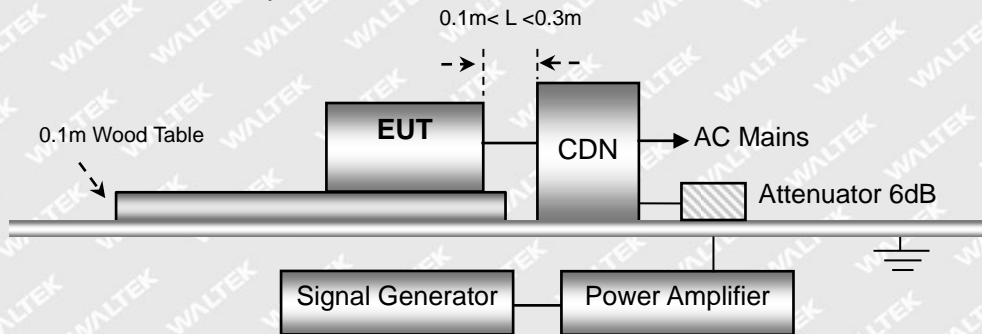

For Signal or Telecommunication Ports:

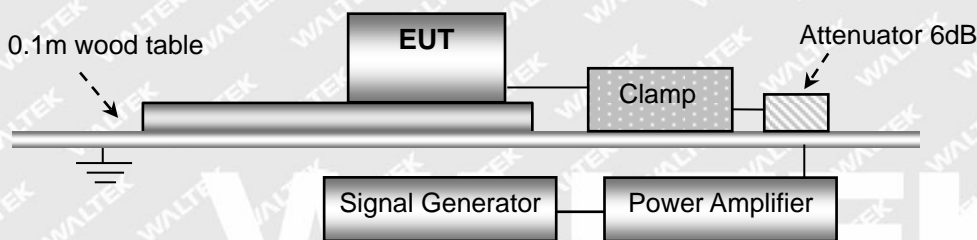

### 11.2 Test Performance

Required Performance Criterion:	A
Mode:	TM1-TM3
Note:	TM3 for CT,CR

### 11.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

### 11.4 Continuous Conducted Disturbances Test Data

Sweep frequency range: 150kHz~80MHz

Frequency step: 1% of fundamental

Dwell time: 1 second



Test Mode		TM1-TM3		
Level	Voltage (V) (rms, unmodulated)	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/


Test Result: Pass

# WALTEK



## 12. Voltage Dips and Interruptions

### 12.1 Test Setup Block Diagram

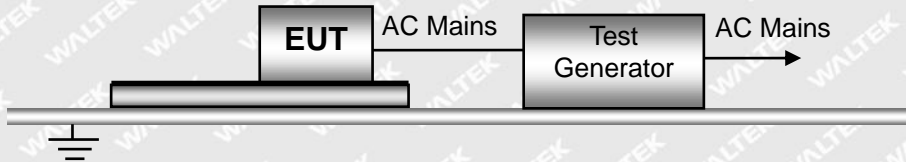

### 12.2 Test Performance

Required Performance Criterion:	B for voltage dip/ C for voltage interruption
Mode:	TM1-TM3
Note: TM3 for TT, TR	

### 12.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

### 12.4 Voltage Dips And Interruptions Test Data

U: Voltage dips in %  $U_T$  ( $U_T$  is rated voltage for the EUT)

T: Test duration

Level	U	T	Phase Angle	N	Pass	Fail
1	100%	10ms	0/90/180/270	3	A	/
2	100%	20ms	0/90/180/270	3	B	/
3	30%	500ms	0/90/180/270	3	B	/
4	100%	5000ms	0/90/180/270	3	C	/

Test Result: Pass



## EXHIBIT 1 - EUT PHOTOGRAPHS

---


Please refer to "ANNEX".

# WALTEK



## EXHIBIT 2 - TEST SETUP PHOTOGRAPHS

**Conducted Emission  
Test Setup**

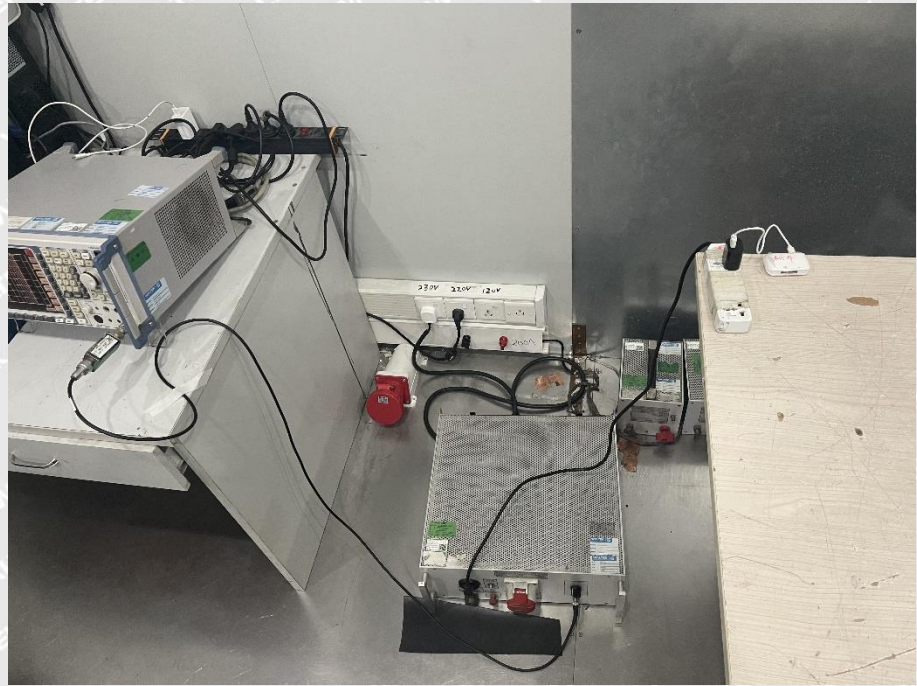


**Radiation Emission  
Test View(30MHz to  
1GHz)**





**Radiation Emission  
Test Setup (Above  
1GHz)**

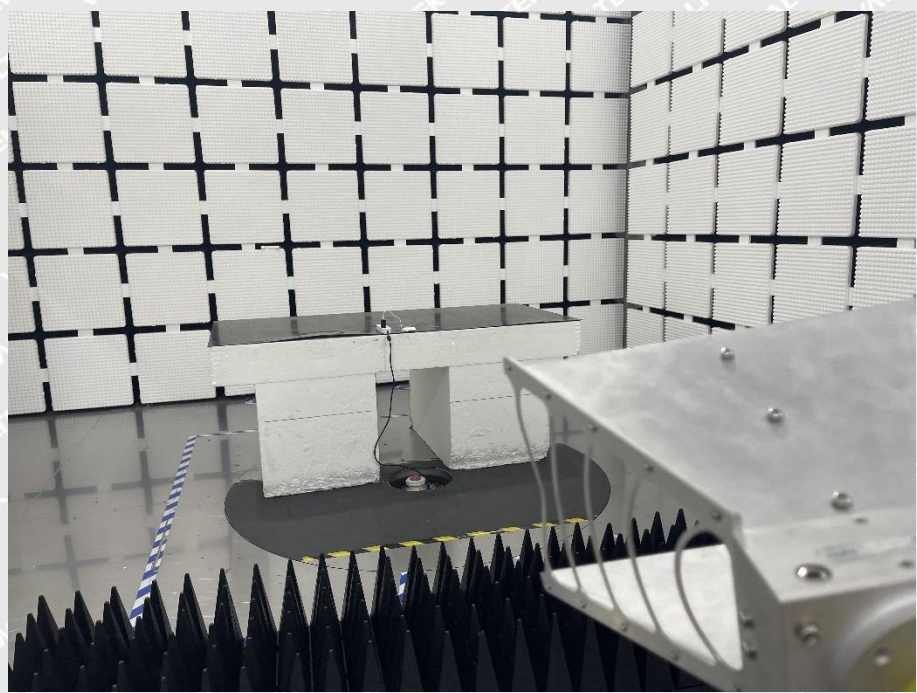


**Harmonic/Flicker Test  
View**






**ESD Test View**

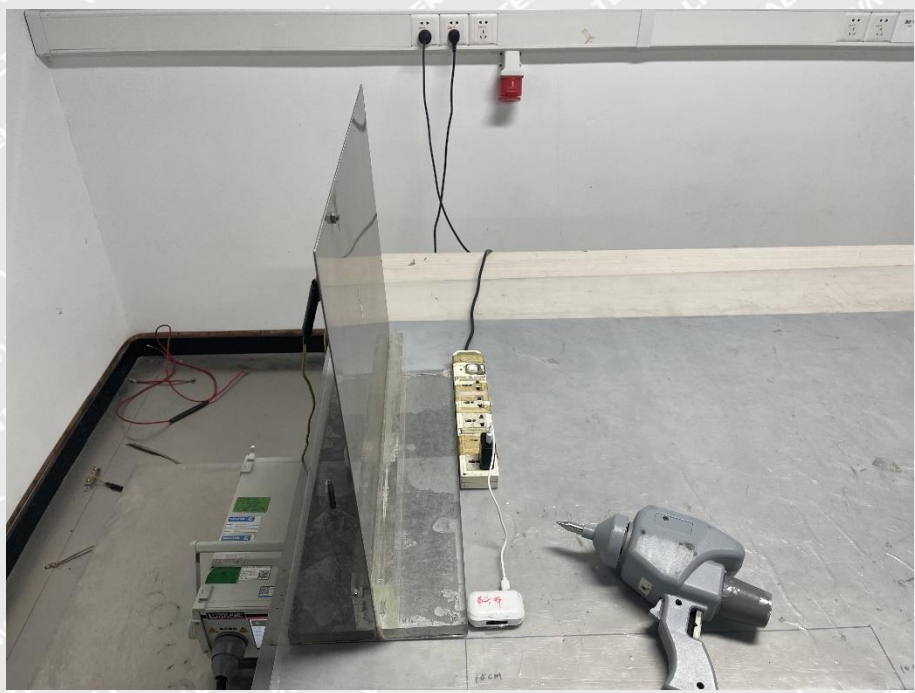


**R/S Test View**

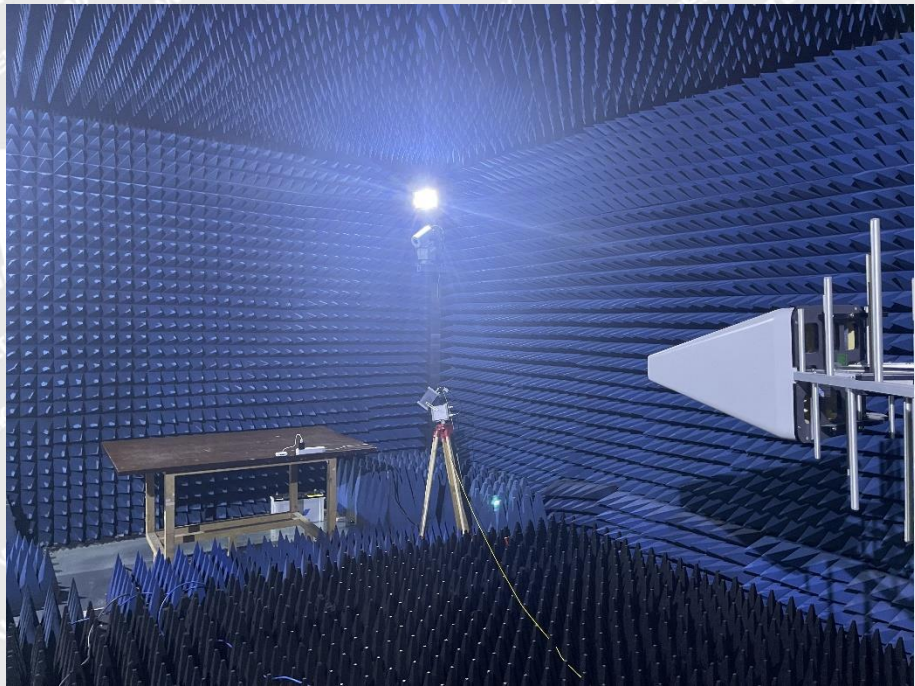





**EFT/ Surges/ Dips and Interruptions Test View**

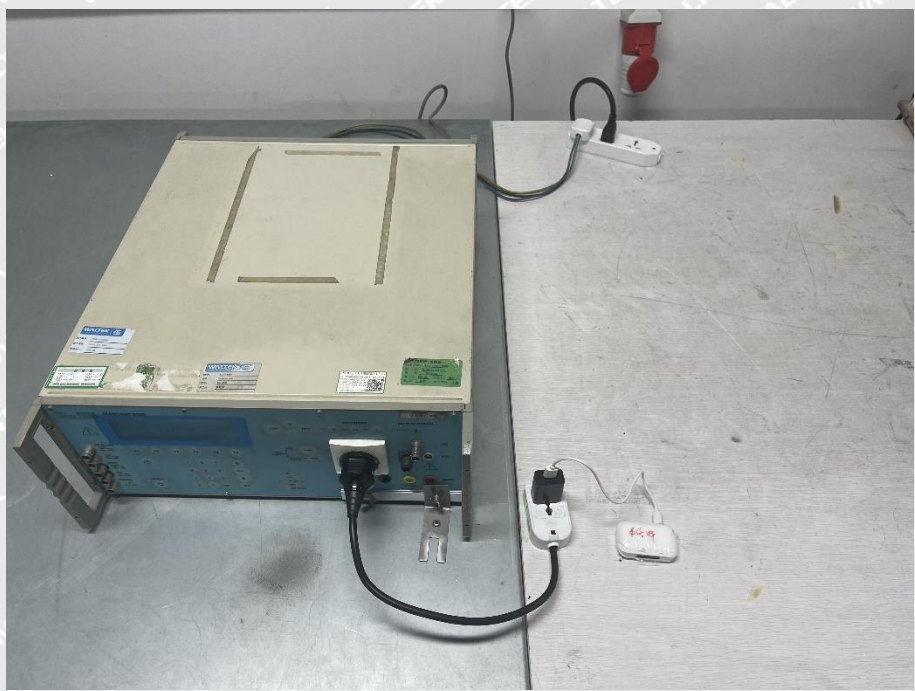

**CS Test View**



\*\*\*\* END OF REPORT \*\*\*\*