

# **Test Report**

Report No.: AGC05443231019SS01

**PRODUCT DESIGNATION**: Solar powered 20 LED light

**BRAND NAME** : N/A

MODEL NAME : MO2151

**CLIENT**: MID OCEAN BRANDS B.V

**DATE OF ISSUE** : Oct. 25, 2023

**STANDARD(S)** : EN 62471:2008

**REPORT VERSION**: V1.0

Attestation of Global Corpliance (Shenzhen) Co., Ltd.



nody no history Lv

Page 2 of 16

# TEST REPORT EN 62471

## Photobiological safety of lamps and lamp systems

Report reference No....... AGC05443231019SS01

Tested by (+ signature)..... Mody Mo

Reviewed by (+ signature)..... Vicky Lv

(Authorized officer)

Contents...... Total 16 pages

**Testing laboratory** 

Name...... Attestation of Global Compliance (Shenzhen) Co., Ltd.

Heping Community, Fuhai Street, Bao 'an District, Shenzhen,

Guangdong, China

Test location...... Same as above

**Applicant** 

Name ...... MID OCEAN BRANDS B.V

Kowloon, Hong Kong

Manufacturer

Name ...... MID OCEAN BRANDS B.V

Kowloon, Hong Kong

**Factory** 

Name ...... MID OCEAN BRANDS B.V

Kowloon, Hong Kong

**Test specification** 

Standard.....: EN 62471:2008

Non-standard test method..... N/A

Test Report Form/blank test report

Test Report Form No...... AGC62471A1

TRF originator ...... AGC

Master TTRF...... Dated 2009-06



Page 3 of 16

| Test item   |  |                          |  |                        |                 |  |
|---|--|--------------------------|--|------------------------|-----------------|--|
| Product designation   |  | :                        | Solar powered 20 LED light                         |                        |                 |  |
| Brand name:   |  | N/A                      |  |                        |                 |  |
| Test model  |  | :                        | MO2151   |                        |                 |  |
| Series models   |  | :                        | N/A  |                        |                 |  |
| Rating(s)   |  | :                        | Solar panel<br>Built-in battery: 3                 | .7V 1200mAH            |                 |  |
| Test item Particulars   | •  |                          |  |                        |                 |  |
| Tested lamp   |  | :                        | ⊠ continuous wa                                    | ve lamps               | d lamp          |  |
| Lamp classification gr  | oup  | :                        | $\square$ exempt $\boxtimes$ r                     | risk 1 🗌 risk 2 🔲 risk | 3               |  |
| Lamp cap  |  | :                        | N/A  |                        |                 |  |
| Bulb  |  | :                        | N/A  |                        |                 |  |
| Used measurement in   | strument   | :                        | SPECTRORADIO                                       | OMETER                 |                 |  |
| Temperature by meas   | surement   | :                        | 25.5°C   |                        |                 |  |
| Information for safety  | use  | :                        | N/A  |                        |                 |  |
| Test case verdicts  |  |                          |  |                        |                 |  |
| Test case does not ap   | oply to the test object.   | :                        | N(/A)  |                        |                 |  |
| Test item does meet t   | he requirement   | :                        | P(ass)   |                        |                 |  |
| Test item does not me   | eet the requirement  | :                        | F(ail)   |                        |                 |  |
| Testing   |  |                          |  |                        |                 |  |
| Date of receipt of test   | item   | :                        | Oct. 17, 2023                                      |                        |                 |  |
| Date(s) of performance  | e of test  | :                        | Oct. 18, 2023                                      |                        |                 |  |
| Attachments   |  |                          |  |                        |                 |  |
| Attachment A  |  | :                        | Photos of product                                  |                        |                 |  |
| The test results prese "(see remark #)" refers "(see Annex #)" refers | nted in this report rela<br>s to a remark appende<br>to an annex appende<br>t a comma is used as | ite or<br>ed to<br>ed to | nly to the item test<br>the report.<br>the report. |                        | g laboratory.   |  |
| Report Version  | Revise Time  |                          | Issued Date  | Valid Version          | Notes           |  |
| V1.0  | 1  | (                        | Oct. 25, 2023                                      | Valid                  | Initial release |  |
|   |  |                          |  |                        |                 |  |



Page 4 of 16

#### **General product information**

1. This report only evaluate the result of wave length 200nm to 800nm.

The LED package specification as follows:

| Model    | Manufacturer                                       | Vf (V)  | If (mA) | CCT (K)   |
|----------|--|---------|---------|-----------|
| ws-20LED | Ningbo Wushuang Photoelectric Technology Co. , Ltd | 3.0-3.2 | 1200    | 6500-7000 |


#### Summary of testing

The sample tested complies with the requirements of EN 62471:2008 and which is classified as Risk Group 1 according to the requirements of EN 62471:2008.



Page 5 of 16

| EN 62471 |   |                |         |
|----------|---|----------------|---------|
| Clause   | Requirement – Test  | Result         | Verdict |
| 4        | Exposure Limits   |                | Р       |
| 4.1      | General   |                | Р       |
|          | The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure   |                | Р       |
|          | Detailed spectral data of a light source are generally required only if the luminance of the source exceeds 10 <sup>4</sup> cd·m <sup>-2</sup>  | see clause 4.3 | Р       |
| 4.3      | Hazard exposure limits  |                | Р       |
| 4.3.1    | Actinic UV hazard exposure limit for the skin and eye   |                | Р       |
|          | The exposure limit for effective radiant exposure is 30 J·m <sup>-2</sup> within any 8-hour period  |                | Р       |
|          | To protect against injury of the eye or skin from ultraviolet radiation exposure produced by a broadband source, the effective integrated spectral irradiance, E <sub>S</sub> , of the light source shall not exceed the levels defined by:   |                | Р       |
|          | $E_{s} \cdot t = \sum_{200}^{400} \sum_{t} E_{\lambda}(\lambda, t) \cdot S_{UV}(\lambda) \cdot \Delta t \cdot \Delta \lambda \le 30 \qquad \text{J·m}^{2}$  |                | Р       |
|          | The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye or skin shall be computed by:  |                | Р       |
|          | $t_{\text{max}} = \frac{30}{E_{\text{s}}}$ s  |                | Р       |
| 4.3.2    | Near-UV hazard exposure limit for eye   |                | Р       |
|          | For the spectral region 315 nm to 400 nm (UV-A) the total radiant exposure to the eye shall not exceed 10000 J·m <sup>-2</sup> for exposure times less than 1000 s. For exposure times greater than 1000 s (approximately 16 minutes) the UV-A irradiance for the unprotected eye, E <sub>UVA</sub> , shall not exceed 10 W·m <sup>-2</sup> . |                | Р       |
|          | The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye for time less than 1000 s, shall be computed by:   |                | N       |
|          | $t_{\text{max}} \le \frac{10000}{E_{\text{UVA}}}$ s   |                | N       |
| 4.3.3    | Retinal blue light hazard exposure limit  |                | Р       |





Page 6 of 16

|        | EN 62471  |                    |         |
|--------|---|--------------------|---------|
| Clause | Requirement – Test  | Result             | Verdict |
|        | To protect against retinal photochemical injury from chronic blue-light exposure, the integrated spectral radiance of the light source weighted against the blue-light hazard function, B( $\lambda$ ), i.e., the blue-light weighted radiance , L <sub>B</sub> , shall not exceed the levels defined by: |                    | Р       |
|        | $L_{B} \cdot t = \sum_{300}^{700} \sum_{t} L_{\lambda}(\lambda, t) \cdot B(\lambda) \cdot \Delta t \cdot \Delta \lambda \le 10^{6}  \text{J·m}^{-2} \cdot \text{sr}^{-1}$   |                    | N       |
|        | $L_{\rm B} = \sum_{300}^{300} L_{\lambda} \cdot B(\lambda) \cdot \Delta \lambda \le 100  \text{W} \cdot \text{m}^{-2} \cdot \text{sr}^{-1}$   |                    | Р       |
| 4.3.4  | Retinal blue light hazard exposure limit - small source   |                    | N       |
|        | Thus the spectral irradiance at the eye $E_{\lambda}$ , weighted against the blue-light hazard function $B(\lambda)$ shall not exceed the levels defined by:  |                    | N       |
|        | $E_{B} \cdot t = \sum_{300}^{700} \sum_{t} E_{\lambda}(\lambda, t) \cdot B(\lambda) \cdot \Delta t \cdot \Delta \lambda \le 100 \text{ J} \cdot \text{m}^{-2}$  |                    | N       |
|        | $E_{\rm B} = \sum_{300}^{700} E_{\lambda} \cdot B(\lambda) \cdot \Delta \lambda \le 1  \text{W} \cdot \text{m}^{-2}$  |                    | N       |
| 4.3.5  | Retinal thermal hazard exposure limit   |                    | Р       |
|        | To protect against retinal thermal injury, the integrated spectral radiance of the light source, $L_{\lambda}$ , weighted by the burn hazard weighting function $R(_{\lambda})$ (from Figure 4.2 and Table 4.2), i.e., the burn hazard weighted radiance, shall not exceed the levels defined by:         |                    | Р       |
|        | $L_{R} = \sum_{380}^{1400} L_{\lambda} \cdot R(\lambda) \cdot \Delta \lambda \leq \frac{50000}{\alpha \cdot t^{0.25}}  \text{W·m}^{-2} \cdot \text{sr}^{-1}$  | (10 µs ≤ t ≤ 10 s) | Р       |
| 4.3.6  | Retinal thermal hazard exposure limit – weak visual stim  | ulus               | N       |
|        | For an infrared heat lamp or any near-infrared source where a weak visual stimulus is inadequate to activate the aversion response, the near infrared (780 nm to 1400 nm) radiance, $L_{\rm IR}$ , as viewed by the eye for exposure times greater than 10 s shall be limited to:                         |                    | N       |
|        | $L_{\rm IR} = \sum_{780}^{1400} L_{\lambda} \cdot R(\lambda) \cdot \Delta \lambda \le \frac{6000}{\alpha}  \text{W·m}^{-2} \cdot \text{sr}^{-1}$  | t > 10 s           | N       |
| 4.3.7  | Infrared radiation hazard exposure limits for the eye   |                    | Р       |
|        | The avoid thermal injury of the cornea and possible delayed effects upon the lens of the eye (cataractogenesis), ocular exposure to infrared radiation, E <sub>IR</sub> , over the wavelength range 780 nm to 3000 nm, for times less than 1000 s, shall not exceed:                                      |                    | N       |



Page 7 of 16



|        | EN 62471  |            |         |  |  |
|--------|---|------------|---------|--|--|
| Clause | Requirement – Test  | Result     | Verdict |  |  |
|        | $E_{IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta \lambda \le 18000 \cdot t^{-0.75} \text{ W} \cdot \text{m}^{-2}$                             | t ≤ 1000 s | N       |  |  |
|        | For times greater than 1000 s the limit becomes:  |            | N       |  |  |
|        | $E_{\rm IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta \lambda \le 100  \text{W} \cdot \text{m}^{-2}$   | t > 1000 s | N       |  |  |
| 4.3.8  | Thermal hazard exposure limit for the skin  |            | Р       |  |  |
|        | Visible and infrared radiant exposure (380 nm to 3000 nm) of the skin shall be limited to:  |            | Р       |  |  |
|        | $E_{H} \cdot t = \sum_{380}^{3000} \sum_{t} E_{\lambda}(\lambda, t) \cdot \Delta t \cdot \Delta \lambda \le 20000 \cdot t^{0,25}  J \cdot m^{-2}$ |            | Р       |  |  |

| 5     | MEASUREMENT OF LAMPS AND LAMP SYSTEMS  |  | Р |
|-------|--|--|---|
| 5.1   | Measurement conditions   |  | Р |
|       | Measurement conditions shall be reported as part of the evaluation against the exposure limits and the assignment of risk classification.                                  |  | Р |
| 5.1.1 | Lamp ageing (seasoning)  |  | Р |
|       | Seasoning of lamps shall be done as stated in the appropriate IEC lamp standard.   |  | N |
| 5.1.2 | Test environment   |  | Р |
|       | For specific test conditions, see the appropriate IEC lamp standard or in absence of such standards, the appropriate national standards or manufacturer's recommendations. |  | Р |
| 5.1.3 | Extraneous radiation   |  | Р |
|       | Careful checks should be made to ensure that extraneous sources of radiation and reflections do not add significantly to the measurement results.                          |  | Р |
| 5.1.4 | Lamp operation   |  | Р |
|       | Operation of the test lamp shall be provided in accordance with:   |  | Р |
|       | the appropriate EN lamp standard, or   |  | N |
|       | the manufacturer's recommendation  |  | Р |
| 5.1.5 | Lamp system operation  |  | N |
|       | The power source for operation of the test lamp shall be provided in accordance with:  |  | N |
|       | the appropriate EN standard, or  |  | N |



Page 8 of 16

| EN 62471 |  |               |         |
|----------|--|---------------|---------|
| Clause   | Requirement – Test   | Result        | Verdict |
|          | the manufacturer's recommendation  |               | N       |
| 5.2      | Measurement procedure  |               | Р       |
| 5.2.1    | Irradiance measurements  |               | Р       |
|          | Minimum aperture diameter 7mm.   |               | Р       |
|          | Maximum aperture diameter 50 mm.   |               | Р       |
|          | The measurement shall be made in that position of the beam giving the maximum reading.   |               | Р       |
|          | The measurement instrument is adequate calibrated.   |               | Р       |
| 5.2.2    | Radiance measurements  |               | Р       |
| 5.2.2.1  | Standard method  |               | Р       |
|          | The measurements made with an optical system.  |               | Р       |
|          | The instrument shall be calibrated to read in absolute radiant power per unit receiving area and per unit solid angle to acceptance averaged over the field of view of the instrument. |               | Р       |
| 5.2.2.2  | Alternative method   |               | N       |
|          | Alternatively to an imaging radiance set-up, an irradiance measurement set-up with a circular field stop placed at the source can be used to perform radiance measurements.            |               | N       |
| 5.2.3    | Measurement of source size   |               | Р       |
|          | The determination of $\alpha$ , the angle subtended by a source, requires the determination of the 50% emission points of the source.  |               | Р       |
| 5.2.4    | Pulse width measurement for pulsed sources   |               | N       |
|          | The determination of $\Delta t$ , the nominal pulse duration of a source, requires the determination of the time during which the emission is > 50% of its peak value.                 |               | N       |
| 5.3      | Analysis methods   |               | Р       |
| 5.3.1    | Weighting curve interpolations   |               | N       |
|          | To standardize interpolated values, use linear interpolation on the log of given values to obtain intermediate points at the wavelength intervals desired.                             | see table 4.1 | N       |
| 5.3.2    | Calculations   |               | Р       |
|          | The calculation of source hazard values shall be performed by weighting the spectral scan by the appropriate function and calculating the total weighted energy.                       |               | Р       |
| 5.3.3    | Measurement uncertainty  |               | Р       |



Page 9 of 16

|        | EN 62471   |                         |         |  |  |
|--------|--|-------------------------|---------|--|--|
| Clause | Requirement – Test   | Result                  | Verdict |  |  |
|        | The quality of all measurement results must be quantified by an analysis of the uncertainty. | see Annex C in the norm | Р       |  |  |

| 6     | LAMP CLASSIFICATION   |   | Р |
|-------|---|---|---|
|       | For the purposes of this standard it was decided that the values shall be reported as follows:  | see table 6.1   | Р |
|       | for lamps intended for general lighting service, the hazard values shall be reported as either irradiance or radiance values at a distance which produces an illuminance of 500 lux, but not at a distance less than 200 mm | Tested at a distance which produces an illuminance of 500 lux | Р |
|       | for all other light sources, including pulsed lamp sources, the hazard values shall be reported at a distance of 200 mm   |   | N |
| 6.1   | Continuous wave lamps   |   | Р |
| 6.1.1 | Except Group  |   | N |
|       | In the except group are lamps, which does not pose any photobiological hazard. The requirement is met by any lamp that does not pose:   |   | N |
|       | <ul> <li>an actinic ultraviolet hazard (E<sub>S</sub>) within 8-hours<br/>exposure (30000 s), nor</li> </ul>  |   | N |
|       | <ul> <li>a near-UV hazard (E<sub>UVA</sub>) within 1000 s, (about 16 min), nor</li> </ul>   |   | N |
|       | <ul> <li>a retinal blue-light hazard (L<sub>B</sub>) within 10000 s (about 2,8 h), nor</li> </ul>   |   | N |
|       | <ul> <li>a retinal thermal hazard (L<sub>R</sub>) within 10 s, nor</li> </ul>   |   | N |
|       | <ul> <li>an infrared radiation hazard for the eye (E<sub>IR</sub>) within<br/>1000 s</li> </ul>   |   | N |
| 6.1.2 | Risk Group 1 (Low-Risk)   |   | Р |
|       | In this group are lamps, which exceeds the limits for the except group but that does not pose:  |   | Р |
|       | <ul> <li>an actinic ultraviolet hazard (E<sub>S</sub>) within 10000 s, nor</li> </ul>   |   | Р |
|       | <ul> <li>a near ultraviolet hazard (E<sub>UVA</sub>) within 300 s, nor</li> </ul>   |   | Р |
|       | <ul> <li>a retinal blue-light hazard (L<sub>B</sub>) within 100 s, nor</li> </ul>   |   | Р |
|       | <ul> <li>a retinal thermal hazard (L<sub>R</sub>) within 10 s, nor</li> </ul>   |   | Р |
|       | <ul> <li>an infrared radiation hazard for the eye (E<sub>IR</sub>) within<br/>100 s</li> </ul>  |   | Р |
|       | Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal   |   | Р |



Page 10 of 16

|        | EN 62471   |        |         |
|--------|--|--------|---------|
| Clause | Requirement – Test   | Result | Verdict |
|        | hazard (L <sub>IR</sub> ), within 100 s are in Risk Group 1.   |        |         |
| 6.1.3  | Risk Group 2 (Moderate-Risk)   |        | N       |
|        | This requirement is met by any lamp that exceeds the limits for Risk Group 1, but that does not pose:  |        | N       |
|        | <ul> <li>an actinic ultraviolet hazard (E<sub>s</sub>) within 1000 s exposure, nor</li> </ul>  |        | N       |
|        | <ul> <li>a near ultraviolet hazard (E<sub>UVA</sub>) within 100 s, nor</li> </ul>  |        | N       |
|        | <ul> <li>a retinal blue-light hazard (L<sub>B</sub>) within 0,25 s<br/>(aversion response), nor</li> </ul>   |        | N       |
|        | <ul> <li>a retinal thermal hazard (L<sub>R</sub>) within 0,25 s (aversion response), nor</li> </ul>  |        | N       |
|        | <ul> <li>an infrared radiation hazard for the eye (E<sub>IR</sub>) within<br/>10 s</li> </ul>  |        | N       |
|        | Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (L <sub>IR</sub> ), within 10 s are in Risk Group 2.  |        | N       |
| 6.1.4  | Risk Group 3 (High-Risk)   |        | Р       |
|        | Lamps which exceed the limits for Risk Group 2 are in Group 3.   |        | Р       |
| 6.2    | Pulsed lamps   |        | N       |
|        | Pulse lamp criteria shall apply to a single pulse and to any group of pulses within 0,25 s.  |        | N       |
|        | A pulsed lamp shall be evaluated at the highest nominal energy loading as specified by the manufacturer.   |        | N       |
|        | The risk group determination of the lamp being tested shall be made as follows:  |        | N       |
|        | <ul> <li>a lamp that exceeds the exposure limit shall be<br/>classified as belonging to Risk Group 3 (High-Risk)</li> </ul>  |        | N       |
|        | for single pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance does is below the EL shall be classified as belonging to the Exempt Group   |        | N       |
|        | for repetitively pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance dose is below the EL, shall be evaluated using the continuous wave risk criteria discussed in clause 6.1, using time averaged values of the pulsed emission |        | N       |



Page 11 of 16

|        | IEC 62471          |        |         |
|--------|--------------------|--------|---------|
| Clause | Requirement – Test | Result | Verdict |

| ole 4.1 | Spectral we                  | eighting function for assessing        | ultraviolet hazards for sk | rin and eye P                          |
|---------|------------------------------|--|----------------------------|--|
|         | elength <sup>1</sup><br>, nm | UV hazard function S <sub>υν</sub> (λ) | Wavelength<br>λ, nm        | UV hazard function S <sub>υν</sub> (λ) |
|         | 200                          | 0,030                                  | 313*                       | 0,006                                  |
| - 7     | 205                          | 0,051                                  | 315                        | 0,003                                  |
|         | 210                          | 0,075                                  | 316                        | 0,0024                                 |
| - 2     | 215                          | 0,095                                  | 317                        | 0,0020                                 |
| 2       | 220                          | 0,120                                  | 318                        | 0,0016                                 |
| 2       | 225                          | 0,150                                  | 319                        | 0,0012                                 |
| 2       | 230                          | 0,190                                  | 320                        | 0,0010                                 |
| 2       | 235                          | 0,240                                  | 322                        | 0,00067                                |
| 2       | 240                          | 0,300                                  | 323                        | 0,00054                                |
| 2       | 245                          | 0,360                                  | 325                        | 0,00050                                |
| 2       | 250                          | 0,430                                  | 328                        | 0,00044                                |
| 2       | 254*                         | 0,500                                  | 330                        | 0,00041                                |
| 2       | 255                          | 0,520                                  | 333*                       | 0,00037                                |
| 2       | 260                          | 0,650                                  | 335                        | 0,00034                                |
| 2       | 265                          | 0,810                                  | 340                        | 0,00028                                |
| 2       | 270                          | 1,000                                  | 345                        | 0,00024                                |
| 2       | 275                          | 0,960                                  | 350                        | 0,00020                                |
| 2       | 280*                         | 0,880                                  | 355                        | 0,00016                                |
| 2       | 285                          | 0,770                                  | 360                        | 0,00013                                |
| 2       | 290                          | 0,640                                  | 365*                       | 0,00011                                |
| 2       | 295                          | 0,540                                  | 370                        | 0,000093                               |
| 2       | 297*                         | 0,460                                  | 375                        | 0,000077                               |
| (       | 300                          | 0,300                                  | 380                        | 0,000064                               |
| 3       | 303*                         | 0,120                                  | 385                        | 0,000053                               |
|         | 305                          | 0,060                                  | 390                        | 0,000044                               |
|         | 308                          | 0,026                                  | 395                        | 0,000036                               |
| - (     | 310                          | 0,015                                  | 400                        | 0,000030                               |

Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths.

<sup>\*</sup> Emission lines of a mercury discharge spectrum.

| Table 4.2        | Spectral weighting functions for assessing retinal hazards from broadband optical sources |                                     |                           |      |  |  |  |  |
|------------------|---|-------------------------------------|---------------------------|------|--|--|--|--|
| Wavelength<br>nm |   | Blue-light hazard function<br>Β (λ) | Burn hazard func<br>R (λ) | tion |  |  |  |  |
|                  | 300   | 0,01                                |                           |      |  |  |  |  |
|                  | 305   | 0,01                                |                           |      |  |  |  |  |
|                  | 310   | 0,01                                |                           |      |  |  |  |  |
|                  | 315   | 0,01                                |                           |      |  |  |  |  |
|                  | 320   | 0,01                                |                           |      |  |  |  |  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 12 of 16

|        |                    | IEC 624                    | 71     |                                |
|--------|--------------------|----------------------------|--------|--------------------------------|
| Clause | Requirement – Test |                            | Result | Verdic                         |
|        | 325                | 0.01                       |        |                                |
|        |                    | 0,01                       |        |                                |
|        | 330                | 0,01                       |        |                                |
|        | 335<br>340         | 0,01<br>0,01               |        |                                |
|        | 345                | 0,01                       |        |                                |
|        | 350                | 0,01                       |        |                                |
|        | 355                | 0,01                       |        |                                |
|        | 360                | 0,01                       |        |                                |
|        | 365                | 0,01                       |        |                                |
|        | 370                | 0,01                       |        |                                |
|        | 375                | 0,01                       |        |                                |
|        | 380                | 0,01                       |        | 0,1                            |
|        | 385                | 0,013                      |        | 0,13                           |
|        | 390                | 0,025                      |        | 0,25                           |
|        | 395                | 0,05                       |        | 0,5                            |
|        | 400                | 0,10                       |        | 1,0                            |
|        | 405                | 0,20                       |        | 2,0                            |
|        | 410                | 0,40                       |        | 4,0                            |
|        | 415                | 0,80                       |        | 8,0                            |
|        | 420                | 0,90                       |        | 9,0                            |
|        | 425                | 0,95                       |        | 9,5                            |
|        | 430                | 0,98                       |        | 9,8                            |
|        | 435                | 1,00                       |        | 10,0                           |
|        | 440                | 1,00                       |        | 10,0                           |
|        | 445                | 0,97                       |        | 9,7                            |
|        | 450                | 0,94                       |        | 9,4                            |
|        | 455                | 0,90                       |        | 9,0                            |
|        | 460                | 0,80                       |        | 8,0                            |
|        | 465                | 0,70                       |        | 7,0                            |
|        | 470                | 0,62                       |        | 6,2                            |
|        | 475                | 0,55                       |        | 5,5                            |
|        | 480                | 0,45                       |        | 4,5                            |
|        | 485                | 0,40                       |        | 4,0                            |
|        | 490                | 0,22                       |        | 2,2                            |
|        | 495                | 0,16                       |        | 1,6                            |
|        | 500-600            | 10 <sup>[(450-λ)/50]</sup> |        | 1,0                            |
|        | 600-700            | 0,001                      |        | 1,0                            |
|        | 700-1050           |                            |        | 10 <sup>[(700-λ)/500]</sup>    |
|        | 1050-1150          |                            |        | 0,2                            |
|        | 1150-1200          |                            |        | 0,2·10 <sup>0,02(1150-λ)</sup> |
|        | 1200-1400          |                            |        | 0,02                           |



Page 13 of 16

| IEC 62471 |                    |        |         |  |  |  |
|-----------|--------------------|--------|---------|--|--|--|
| Clause    | Requirement – Test | Result | Verdict |  |  |  |

| Table 5.4                | Summary of the ELs for the   | surface of the s    | kin or cornea (             | (irradiance bas                   | sed values)                                     | Р    |
|--------------------------|--|---------------------|-----------------------------|-----------------------------------|---|------|
| Hazard<br>Name           | Relevant equation  | Wavelength range nm | Exposure<br>duration<br>sec | Limiting<br>aperture<br>rad (deg) | EL in terms of<br>irradian<br>W•m <sup>-2</sup> | се   |
| Actinic UV skin<br>& eye | $E_{S} = \sum E_{\lambda} \bullet S(\lambda) \bullet \Delta \lambda$ | 200 – 400           | < 30000                     | 1,4 (80)                          | 30/t  |      |
| Eye UV-A                 | $E_{UVA} = \sum E_{\lambda} \bullet \Delta \lambda$                  | 315 – 400           | ≤1000<br>>1000              | 1,4 (80)                          | 10000/t<br>10                                   |      |
| Blue-light small source  | $E_B = \sum E_\lambda \bullet B(\lambda) \bullet \Delta \lambda$     | 300 – 700           | ≤100<br>>100                | < 0,011                           | 100/t<br>1,0                                    |      |
| Eye IR                   | $E_{IR} = \sum E_{\lambda} \bullet \Delta \lambda$                   | 780 –3000           | ≤1000<br>>1000              | 1,4 (80)                          | 18000/t 100                                     | 0,75 |
| Skin thermal             | $E_H = \sum E_\lambda \bullet \Delta \lambda$                        | 380 – 3000          | < 10                        | 2π sr                             | 20000/t   | 0,75 |

| Table 5.5                                       | Sun | Summary of the ELs for the retina (radiance based values)         |                     |   |  |   |          |  |  |
|---|-----|---|---------------------|---|--|---|----------|--|--|
| Hazard Name                                     |     | Relevant equation   | Wavelength range nm | Exposure<br>duration<br>sec                 | Field of view radians                      | EL in term constant radiance  |          |  |  |
| Blue light                                      |     | $L_{B} = \sum L_{\lambda} \cdot B(\lambda) \cdot \Delta \lambda$  | 300 – 700           | 0,25 - 10<br>10-100<br>100-10000<br>≥ 10000 | 0,011•√(t/10)<br>0,011<br>0,0011•√t<br>0,1 | 10 <sup>6</sup> /t<br>10 <sup>6</sup> /t<br>10 <sup>6</sup> /t<br>100 |          |  |  |
| Retinal thermal                                 |     | $L_{R} = \sum L_{\lambda} \cdot R(\lambda) \cdot \Delta \lambda$  | 380 – 1400          | < 0,25<br>0,25 – 10                         | 0,0017<br>0,011•√(t/10)                    | 50000/(α•1<br>50000/(α•1  | <i>'</i> |  |  |
| Retinal<br>thermal<br>(weak visual<br>stimulus) |     | $L_{IR} = \sum L_{\lambda} \cdot R(\lambda) \cdot \Delta \lambda$ | 780 – 1400          | > 10  | 0,011                                      | 6000/c  | T.       |  |  |



Page 14 of 16

| IEC 62471  |  |                 |                       |         |       |    |           |          |         |         |
|--|--|-----------------|-----------------------|---------|-------|----|-----------|----------|---------|---------|
| Clause   | Requirement – Test Result                                |                 |                       |         |       |    |           |          |         | Verdict |
| Table 6.1  | Emission limits for risk groups of continuous wave lamps |                 |                       |         |       |    |           | N        |         |         |
|  | Action   |                 |                       |         |       | Em | ission Me | asuremer | nt      |         |
| Risk   | spectru  | Symbol          | Units                 | Ex      | empt  |    | Low       | risk     | Mod     | risk    |
|  | m  |                 |                       | Limit   | Resul | lt | Limit     | Result   | Limit   | Result  |
| Actinic UV                                       | S <sub>UV</sub> (λ)                                      | Es              | W•m⁻²                 | 0.001   |       |    | 0,003     |          | 0,03    |         |
| Near UV  |  | Euva            | W•m⁻²                 | 10      |       |    | 33        |          | 100     |         |
| Blue light                                       | Β(λ)   | L <sub>B</sub>  | W•m <sup>-2</sup> •sr | 100     |       |    | 10000     |          | 4000000 |         |
| Blue light,<br>small<br>source                   | Β(λ)   | E <sub>B</sub>  | W•m⁻²                 | 1.0*    |       |    | 1,0       |          | 400     |         |
| Retinal<br>thermal                               | R(λ)   | L <sub>R</sub>  | W•m <sup>-2</sup> •sr | 28000/α |       |    | 28000/α   |          | 71000/α |         |
| Retinal<br>thermal,<br>weak visual<br>stimulus** | R(λ)   | L <sub>IR</sub> | W•m <sup>-2</sup> •sr | 6000/α  |       |    | 6000/α    |          | 6000/α  |         |
| IR<br>radiation,<br>eye                          |  | E <sub>IR</sub> | W•m⁻²                 | 100     |       |    | 570       |          | 3200    |         |

<sup>\*</sup> Small source defined as one with  $\alpha$  < 0,011 radian. Averaging field of view at 10000 s is 0,1 radian.

<sup>\*\*</sup> Involves evaluation of non-GLS source



Page 15 of 16

|     | EN 62471   |  |   |  |  |  |  |
|-----|--|--|---|--|--|--|--|
|     | CENELEC COMMON MODIFICATIONS (EN)  |  |   |  |  |  |  |
| 4   | EXPOSURE LIMITS  |  | Р |  |  |  |  |
|     | Contents of the whole Clause 4 of IEC 62471:2006 moved into a new informative Annex ZB                                       |  |   |  |  |  |  |
|     | Clause 4 replaced by the following:  |  | Р |  |  |  |  |
|     | Limits of the Artificial Optical Radiation Directive (2006/25/EC) have been applied instead of those fixed in IEC 62471:2006 |  | Р |  |  |  |  |
| 4.1 | General  |  | Р |  |  |  |  |
|     | First paragraph deleted  |  |   |  |  |  |  |

| Table 6.1   | Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) |                 |   |                      |        |         |           |          | Р          |  |  |
|---|---|-----------------|---|----------------------|--------|---------|-----------|----------|------------|--|--|
|   |   |                 |   | Emission Measurement |        |         |           |          |            |  |  |
| Risk  | Action  | Symbol          | Units   | Exe                  | mpt    | Lo      | Low risk  |          | risk       |  |  |
|   | spectrum  |                 |   | Limit                | Result | Limit   | Result    | Limit    | Resul<br>t |  |  |
| Actinic<br>UV                                       | S <sub>UV</sub> (λ)   | Es              | W•m⁻²   | 0.001                |        | 0.003   | 9.251E-04 | 0.03     |            |  |  |
| Near UV   |   | Euva            | W•m⁻²   | 0.33                 |        | 33      | 7.744E-05 | 100      |            |  |  |
| Blue light  | Β(λ)  | L <sub>B</sub>  | W•m <sup>-</sup> <sup>2</sup> •sr <sup>-1</sup> | 100                  |        | 10000   | 2.674E+02 | 4000000  |            |  |  |
| Blue light,<br>small<br>source                      | Β(λ)  | E <sub>B</sub>  | W•m⁻²   | 0.01*                |        | 1,0     |           | 400      |            |  |  |
| Retinal thermal                                     | R(λ)  | L <sub>R</sub>  | W•m <sup>-</sup> <sup>2</sup> •sr <sup>-1</sup> | 28000/α              |        | 28000/α | 2.907E+03 | 7.100E+0 | 5          |  |  |
| Retinal<br>thermal,<br>weak<br>visual<br>stimulus** | R(λ)  | L <sub>IR</sub> | W•m⁻<br>²•sr⁻¹                                  |                      |        |         |           |          |            |  |  |
|   |   |                 |   | 0.000E+00            |        |         |           |          |            |  |  |
| IR radiation, eye                                   |   | E <sub>IR</sub> | W•m <sup>-2</sup>                               | 100                  |        | 570     | 0.000E+00 | 3200     |            |  |  |

<sup>\*</sup> Small source defined as one with  $\alpha$  < 0,011 radian. Averaging field of view at 10000 s is 0,1 radian.

<sup>\*\*</sup> Involves evaluation of non-GLS source

Page 16 of 16






Fig.1- Overall view of the product

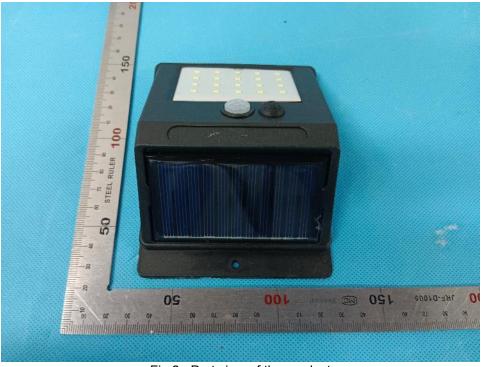


Fig.2- Part view of the product

## ---- End of Report ----



### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.